Delivery:



Open Surface 25% Catena curvilinea Sideflexing belt/chain / Kurvengängige Mattenkette


MAGNETIC SYSTEM


Pins: Ferritic SS | Backflex radius min.: 130 mm





Interchangeable with 260M series

25.4mm

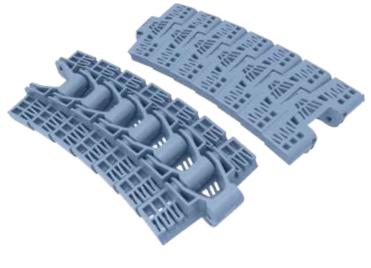







BluLub®&**PFX**

Powerful dry running combination The use of both our exclusive materials unleashes extra-performance and an astounding speed!













Article-Nr.	Ref.	A (Plate Width) mm	Weight kg/m	Max working load (N)	Sideflex radius mm	Material
12050103	LFA 240 XE M FG K330	83,8	1,02	1800	500	LFA
12050303	MX 240 XE M FG K330	83,8	0,98	1450	500	MX
12053003	PFX 240 XE M FG K330	83,8	0,98	1450	500	PFX

D-Shape - Pin locking system

Simple

Easy to insert and release, even when it's already installed.

Reliable

It's engineered to operate without jamming.

Safety system

When pin is inserted, it's locked in and can be removed only when needed.

Main Improvements compared to the 260M belt/chain

Carbon footprint +15% PV limit

