




Ø100

DIAMETER (mm)

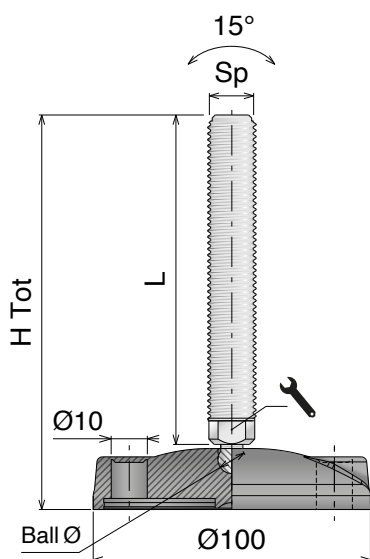


FIXING POINT

Art-Nr.	Art-Nr.	Sp	H Tot (mm)	L (mm)	Ball Ø (mm)	Wrench (mm)	Load (N)
SS	FeZn						
95601	95601Z	M16	108	85	10	13	-
95602	95602Z		158	135	10	13	-
95603	95603Z		208	185	10	13	-
95601H	95601ZH		108	85	10	-	16
95602H	95602ZH		158	135	10	-	16
95603H	95603ZH		208	185	10	-	16
95701	95701Z	M20	108	85	14,5	16	-
95702	95702Z		158	135	14,5	16	-
95703	95703Z		208	185	14,5	16	-
95701H	95701ZH		108	85	14,5	-	20
95702H	95702ZH		158	135	14,5	-	20
95703H	95703ZH		208	185	14,5	-	20



Basic Series POLYAMIDE VERSION

Base and spindle made in polyamide and zinc plated insert.

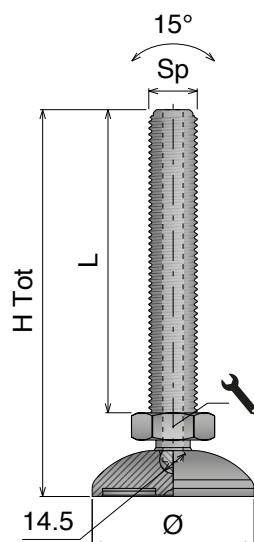

Ø60

DIAMETER (mm)



POLYAMIDE

Art-Nr.	Sp	H Tot (mm)	L (mm)	Wrench (mm)	Load (N)
FeZn insert					
90810PH	M16	105	76	24	12.000

Ø80

DIAMETER (mm)



FIXING POINT



POLYAMIDE

Art-Nr.	Sp	H Tot (mm)	L (mm)	Wrench (mm)	Load (N)
FeZn insert					
95410PH	M16	105	76	24	12.000

Ø100

DIAMETER (mm)



FIXING POINT



POLYAMIDE

Art-Nr.	Sp	H Tot (mm)	L (mm)	Wrench (mm)	Load (N)
FeZn insert					
95710PH	M16	110	76	24	12.000