

# 802 GT/805 GT

Catene in acciaio / Steel chains / Scharnierbandketten aus Edelstahl




## 802 GT/805 GT

Catena rettilinea

Straight running chain / Geradegängige Scharnierbandkette

Delivery: **Easy** **Standard**

Pins: Martensitic 1.4057 | Backflex radius min.: 130 mm

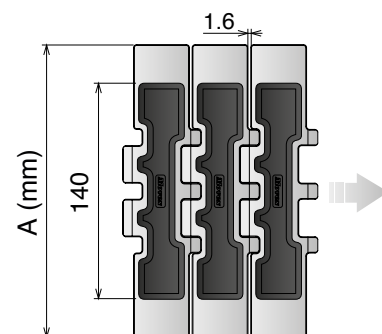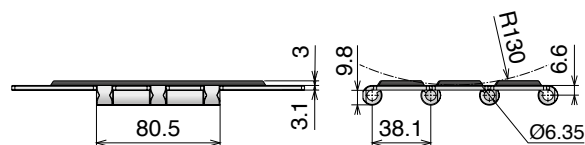

| Article-Nr. | Ref. | A (Plate Width)<br>mm | Weight<br>kg/m | Max working<br>load (N) | Plate/Rubber Thickness<br>mm |
|-------------|------|-----------------------|----------------|-------------------------|------------------------------|
|-------------|------|-----------------------|----------------|-------------------------|------------------------------|

### SS Ferritic Stainless Steel (1.4016)

|                 |                       |       |      |      |                    |
|-----------------|-----------------------|-------|------|------|--------------------|
| <b>10040207</b> | <b>SS 802 GT K750</b> | 190,5 | 6,20 | 7000 | Plate 3,1 Rubber 3 |
|-----------------|-----------------------|-------|------|------|--------------------|

### SSE Specially treated Ferritic Stainless Steel (1.4589) - Hardened pins

|                 |                        |       |      |      |                    |
|-----------------|------------------------|-------|------|------|--------------------|
| <b>10040107</b> | <b>SSE 805 GT K750</b> | 190,5 | 6,20 | 9000 | Plate 3,1 Rubber 3 |
|-----------------|------------------------|-------|------|------|--------------------|