

550 FLIGHT TOP

Tappeto Modulare 550 with Flight, H=8,7 M=85
Modular Belt Series 550 with Flight, H=8,7 M=85 / Modulare Mattenkette 550 with Flight, H=8,7 M=85

CODE STRUCTURE GUIDE

Backflex radius min.: 30 mm

See following table

25.4mm
PITCH

Metric Size



pg. 362/363

pg. 771>781

SAMPLE BOX

Art.-Nr. **5509018888A**

Material

LFA - Code 01

Low friction Acetal

Max w. load: 30000 N/m
Weight: 8,5 kg/m²
Temp. range dry: -40÷80 °C
Temp. range wet: -40÷65 °C
Pin material: PBT white

PP - Code 02

Polypropylene

Max w. load: 18000 N/m
Weight: 8,4 kg/m²
Temp. range dry: 4÷104 °C
Temp. range wet: 4÷104 °C
Pin material: PP blue

LFW - Code 05

Low friction Acetal

Max w. load: 30000 N/m
Weight: 8,5 kg/m²
Temp. range dry: -40÷80 °C
Temp. range wet: -40÷65 °C
Pin material: PBT white

PPW - Code 21

Polypropylene

Max w. load: 18000 N/m
Weight: 8,4 kg/m²
Temp. range dry: 4÷104 °C
Temp. range wet: 4÷104 °C
Pin material: PP blue

LFB - Code 23


Low friction Acetal

Max w. load: 30000 N/m
Weight: 8,5 kg/m²
Temp. range dry: -40÷80 °C
Temp. range wet: -40÷65 °C
Pin material: PBT white




- Easier installation
- Quicker maintenance
- 100% interchangeable


Version A - Standard

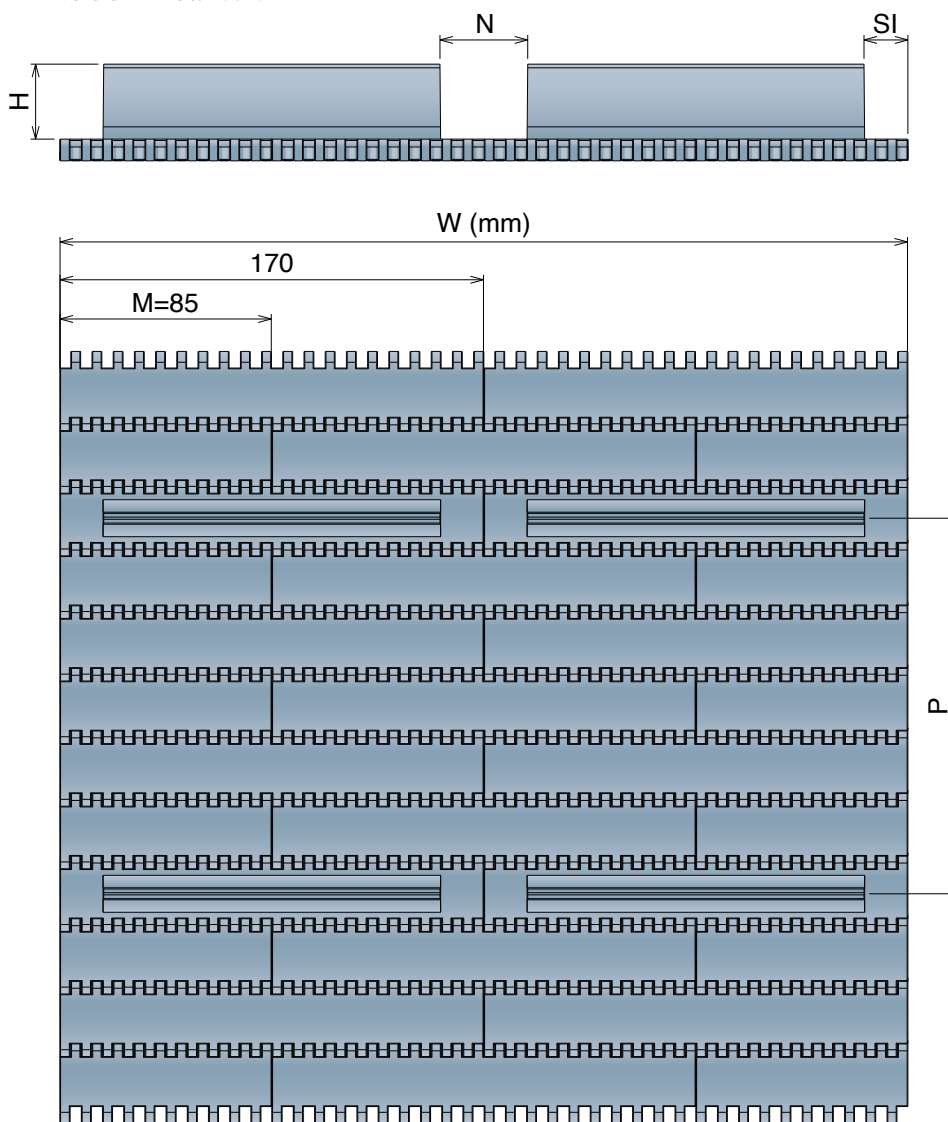

THE PERFECT
SOLUTION
TO CONVEY
EVERY TYPE
OF PRODUCTS
UP AN INCLINE!



Notch utility
RETURN SECTION
with Bar-cap




Side indent utility
RETURN SECTION
with Z-Profile & J-Profile

Request for quotation

Metric Size

Technical drawing

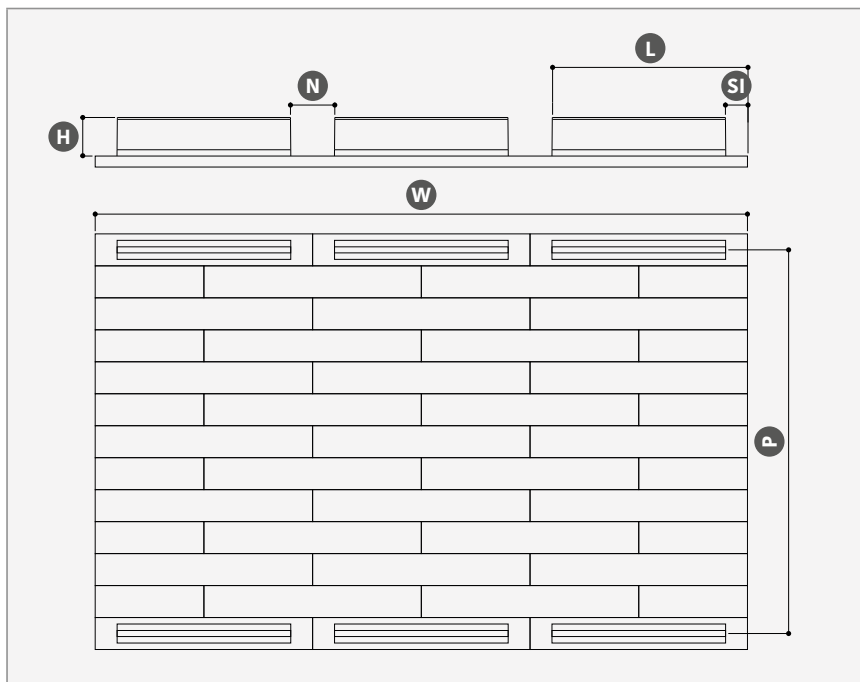

Please fill out the following form or add dimensions into the drawing.

Company

Sales contact

Contact

Date

For different combination, please ask to your sales representative.

Fill out the form and send to your sales contact or to:

info@movexii.com

Technical features

Dimension expressed in millimeter

Belt surface	Flat Top (FT)		Flush Grid (FG)		Grip Top (GT)
Material & colour	LFA	LFW	LFB	PP	PPW
W - Width	Standard (85 multiple)			Special (17 multiple)	
H - Flight height	Standard	Standard	Standard	Special (Max 76)	
	30	51	76		
P - Pitch	Number of pitches or distance between flights (25,4 mm multiple)				
SI - Side Indent*	No	17	30	50	
Notch*	No	Single	Double	Triple	
	N - Notch width (preferred 34 or 60 mm)			L - Notch distance (2 or more)	

Configuration recommended

Dimensions expressed in millimeter

Width ≤ 170	170 > Width ≤ 425	425 > Width ≤ 850	Width > 850