

NEW

590 FG

Tappeto Modulare 590 FG, H=8,7

Modular Belt Series 590 FG, H=8,7 / Modulare Mattenkette 590 FG, H=8,7


Imperial Size

CODE STRUCTURE GUIDE (Example)

Backflex radius min.: 25 mm

5302	01	0085	A
Series	*Material	Width	Version

pg. 361	pg. 771>781



19.05 mm
PITCH

*Material

LFA - Code 01

Low friction Acetal

Easy Delivery

Max w. load: 30000 N/m
Weight: 6,5 kg/m²
Temp. range dry: -40÷80 °C
Temp. range wet: -40÷65 °C
Pin material: PBT white

MX - Code 03

Performance PBT

Max w. load: 24000 N/m
Weight: 6,0 kg/m²
Temp. range dry: -40÷120 °C
Temp. range wet: -40÷60 °C
Pin material: POM grey

LFB - Code 23

Low friction Acetal

Max w. load: 30000 N/m
Weight: 6,5 kg/m²
Temp. range dry: -40÷80 °C
Temp. range wet: -40÷65 °C
Pin material: PBT white


PFX - Code 30

Extra performance PBT


Max w. load: 24000 N/m
Weight: 6,0 kg/m²
Temp. range dry: -40÷120 °C
Temp. range wet: -40÷60 °C
Pin material: POM grey

**THE BEST CHOICE FOR
DRY RUNNING APPLICATIONS**

Version A - Standard

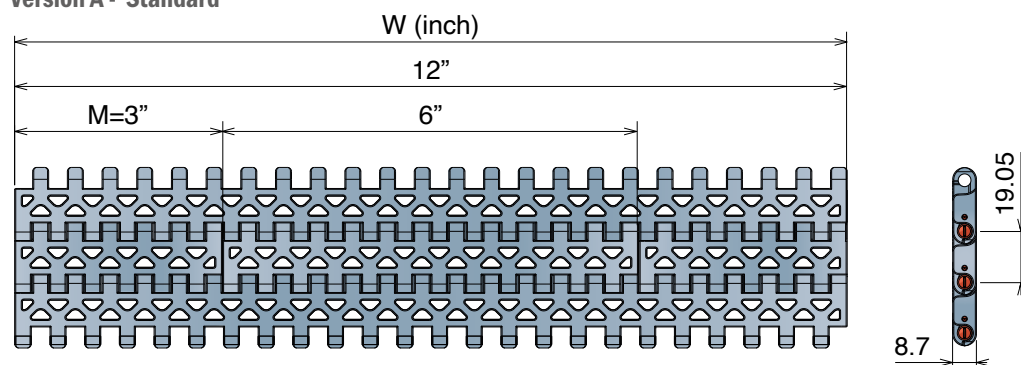

Version C - With 2 Positioner

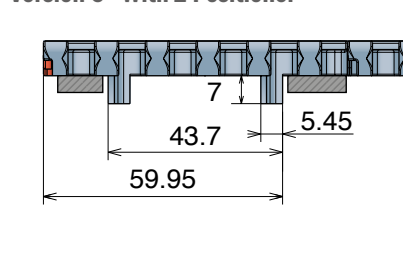

Version A - Standard

Series	Material	Width	Version
5302	*	0003	A
5302	*	0006	A
5302	*	0009	A
5302	*	0012	A
5302	*	0015	A
5302	*	0018	A
5302	*	0021	A
5302	*	0024	A
5302	*	0027	A
5302	*	0030	A
5302	*	0033	A
5302	*	0036	A
5302	*	0039	A
5302	*	0042	A
5302	*	0045	A
5302	*	0048	A
5302	*	0051	A
5302	*	0054	A

Version C - With 2 Positioners

Series	Material	Width	Version
5302	*	0003	C
5302	*	0006	C
5302	*	0009	C
5302	*	0012	C
5302	*	0015	C
5302	*	0018	C
5302	*	0021	C
5302	*	0024	C
5302	*	0027	C
5302	*	0030	C
5302	*	0033	C
5302	*	0036	C
5302	*	0039	C
5302	*	0042	C
5302	*	0045	C
5302	*	0048	C
5302	*	0051	C
5302	*	0054	C