


FL Grub screw


Watertight bearings - solid version

Main features:

- Housing in reinforced polypropylene
- Stainless steel ball bearing (pre-lubricated)
- Stainless steel mounting hole spacers
- Nickel plated steel or SS grease nipple with self-forming thread M6
- Polypropylene open cap with O-ring seal & NBR top seal
- Washer for grease nipple in PE
- NBR bottom seal

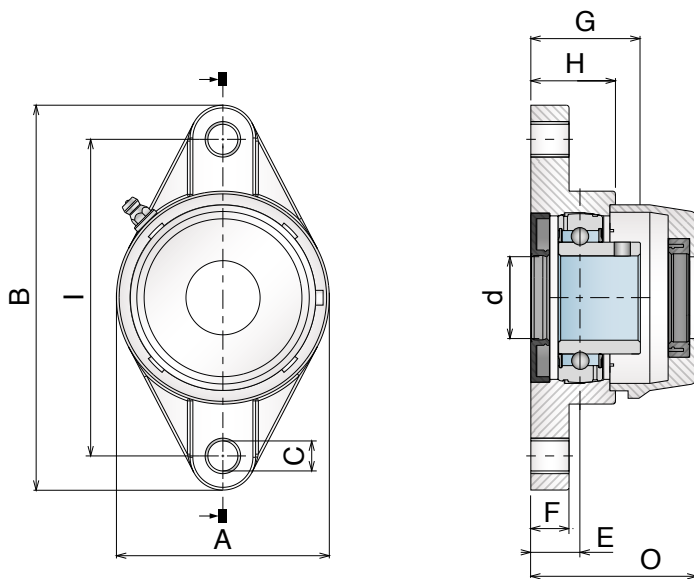

FIXING METHOD



GRUB SCREW

Stainless Steel

Article-Number	Series	d	I	A	B	C	E	F	G	H	O
○ 81330 ● 81330B	FL 204	20	90	64	113	11	15,4	11,4	33,4	26,5	46,5
○ 81331 ● 81331B	FL 205	25	99	70	131	11	17	14	36,5	29,5	51
○ 81335 ● 81335B	FL 206/90,5	30	90,5	84	112,5	11	11,5	20,5	33,5	23,3	50
○ 81332 ● 81332B	FL 206		117	80	148	11	18	14	40	30,5	58
○ 81333 ● 81333B	FL 207	35	130	90	164	13	18	16,1	41,5	32,8	61
○ 81336 ● 81336B	FL 208/119	40	119	99	150	14	13,5	24,5	38,5	27,5	60,5
○ 81334 ● 81334B	FL 208		144	100	176	14	21,5	20	46,5	37,5	71

SS ProRun

Article-Number	Series	d	I	A	B	C	E	F	G	H	O
○ 81330L ● 81330BL	FL 204	20	90	64	113	11	15,4	11,4	33,4	26,5	46,5
○ 81331L ● 81331BL	FL 205	25	99	70	131	11	17	14	36,5	29,5	51
○ 81335L ● 81335BL	FL 206/90,5	30	90,5	84	112,5	11	11,5	20,5	33,5	23,3	50
○ 81332L ● 81332BL	FL 206		117	80	148	11	18	14	40	30,5	58
○ 81333L ● 81333BL	FL 207	35	130	90	164	13	18	16,1	41,5	32,8	61
○ 81336L ● 81336BL	FL 208/119	40	119	99	150	14	13,5	24,5	38,5	27,5	60,5
○ 81334L ● 81334BL	FL 208		144	100	176	14	21,5	20	46,5	37,5	71