

551 FTT


Tappeto Modulare 551 FTT, H=12,7 M=85

Modular Belt Series 551 FTT, H=12,7 M=85 / Modulare Mattenkette 551 FTT, H=12,7 M=85

CODE STRUCTURE GUIDE (Example)

Backflex radius min.: 25 mm



5236	01	0085	C
Series	*Material	Width	Version




25.4mm
PITCH

*Material


LFA - Code 01 Low friction Acetal	MX - Code 03 Performance PBT	MPX - Code 25 Lubricated Acetal
Max w. load: 41500 N/m Weight: 12,5 kg/m ² Temp. range dry: -40÷80 °C Temp. range wet: -40÷65 °C Pin material: PBT white	Max w. load: 33500 N/m Weight: 12,0 kg/m ² Temp. range dry: -40÷120 °C Temp. range wet: -40÷60 °C Pin material: POM grey	Max w. load: 41500 N/m Weight: 12,5 kg/m ² Temp. range dry: -40÷80 °C Temp. range wet: -40÷65 °C Pin material: PBT white

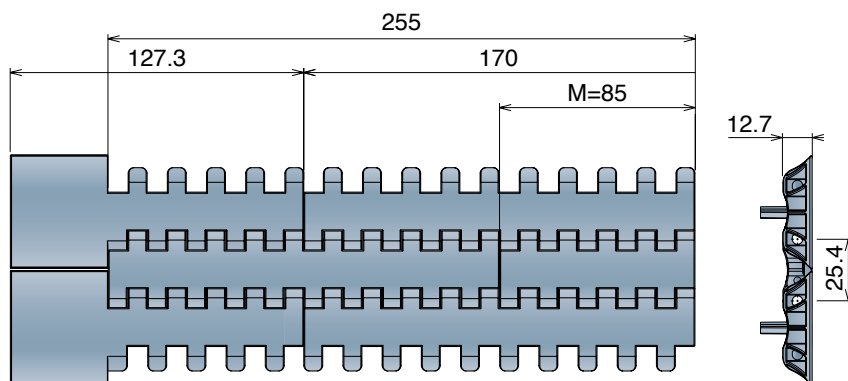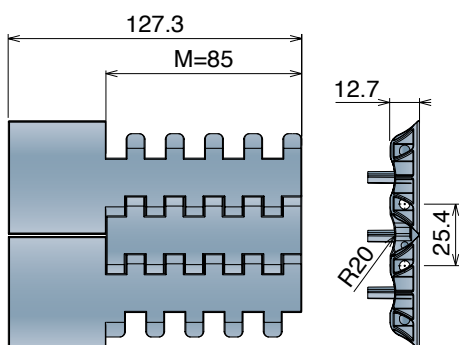

Version C




Version CN - Near

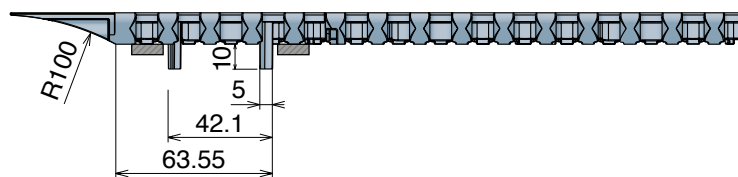

Version C

Series	Material	Width	Version
5236	*	0085	C

Version C0 - Opposite

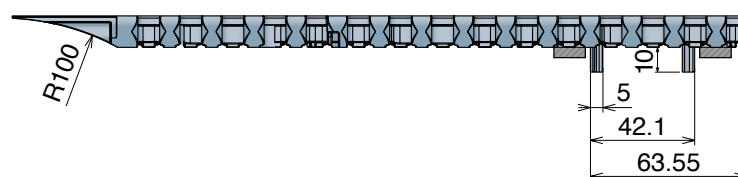

Max working load (N)

Width	85
LFA	3500
MX	2800
MPX	3500

Version CN - Near

Series	Material	Width	Version
5236	*	0170	CN
5236	*	0255	CN

Version C0 - Opposite

Series	Material	Width	Version
5236	*	0170	C0
5236	*	0255	C0