


UCFL Locking collar


Watertight bearings - solid version

Main features:

- Housing in reinforced polypropylene
- Chrome steel ball bearing (pre-lubricated)
- Nickel-plated brass mounting hole spacers
- Nickel plated steel or SS grease nipple with self-forming thread M6
- Polypropylene open cap with O-ring seal & NBR top seal
- Stainless steel washers
- NBR bottom seal

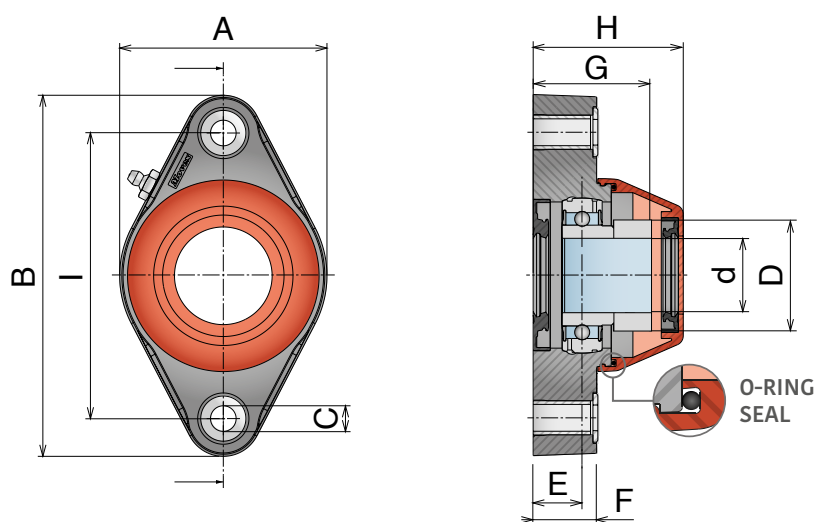

FIXING METHOD
(ECCENTRIC RING)



LOCKING COLLAR

Chrome Steel											
Article-Number	Series	d	I	A	B	C	D	E	F	G	H
82705	UCFL 204/76,5	20	76,5	56	100	10,2	33,3	15,5	12	39,4	49
82710	UCFL 204		90	62	116	11	33,3	16	20	39,9	51,5
82701	UCFL 205/90	25	90	71	130	10,2	38,1	16,8	22,5	40,2	52
82711	UCFL 205		99	71	130	11	38,1	16,8	22,5	40,2	52
82722	UCFL 206/90	30	90	85	116	10,2	44,5	14,5	20	42,2	55,5
82712	UCFL 206		117	85	148	11	44,5	20	26	47,7	61,5
82703	UCFL 207/117	35	117	93	148	11	55,6	19,5	26	49,9	66,5
82723	UCFL 207/117		117	112	148	11	55,6	19,5	26	49,9	66,5
82713	UCFL 207		130	93	162	11	55,6	19,5	26	49,9	66,5
82704	UCFL 208/117	40	117	93	148	11	60,3	19	26	53,7	66,5
82724	UCFL 208/117		117	112	148	11	60,3	19	26	53,7	66,5