

7870 FT

Tappeto Modulare 7870 FT, H=6 M=3"

Modular Belt Series 7870 FT, H=6 M=3" / Modulare Mattenkette 7870 FT, H=6 M=3"

Backflex radius min.: 7.5 mm | Pin diameter: 3 mm

	
NoseBars	Active transfer plate
pg. 354	pg. 307
pg. 334>338	pg. 771>781

SAMPLE BOX

Art.-Nr. 5331018888A

**Pin Sphere®**
AUTO LOCK


- Easier installation
- Quicker maintenance

8 mm
PITCH

Width* (inch)

0003
0006
0009
0012
0015
0018
0021
0024
0027
0030
0033
0036
0039
0042
0045
0048
0051
0054

Version A - Standard

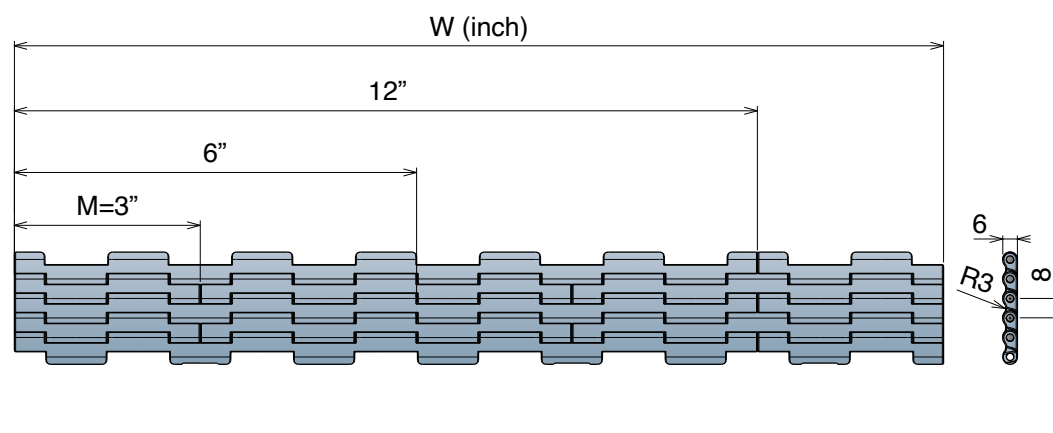

BELT MATERIAL

POM - Acetal resin

BELT COLORS

RAL 5005

Cyan

White

LFA

PINS AVAILABLE

PBT Pin

Max w. load: 3000 N/m
Weight: 5.8 kg/m²
Temp. range: -40+80 °C

**7870 FT**
MOVEX TOOL

Developed to facilitate belt assembly and disassembly.



Article Nr.

29969

Movex tools are made with 3D printer, the color may vary due to availability of the material.

***Belts wider than standard are available with 3 inch increments.**

The nominal tensile strength and the nominal width tolerance are valid for a temperature of 23°C (73 °F).

The actual width of the belt typically falls below the nominal value by 0.1% to 0.3%.

For POM belts up to 750 mm (30") in width, the shrinkage ranges from -3 mm to 1 mm, and for those wider, from -0.35% to 0%.

Non-Standard belt widths are incremented by 25.4 mm (1"). The minimum width is 50.8 mm (2.0").