

600 Heavy duty

Tappeto Modulare Curvilineo Serie 600, H=12,7 M=85
Side Flex Modular Belt Series 600, H=12,7 M=85 / Kurvengängige Mattenkette Serie 600, H=12,7 M=85

CODE STRUCTURE GUIDE (Example)

Backflex radius min.: 25 mm

5422	01	0255	E
Series	*Material	Width	Version

27.5%
OPEN SURFACE

31.75 mm
PITCH

pg. 373	pg. 180	pg. 771>781

*Material

LFA - Code 01

Low friction Acetal

Max w. load:

Straight 30000 N/m

Curve 3500 N

Weight: 8,3 kg/m²

Temp. range dry: -40÷80 °C

Temp. range wet: -40÷65 °C

Pin material: PBT white

LFB - Code 23

Low friction Acetal

Max w. load:

Straight 30000 N/m



Curve 3500 N

Weight: 8,3 kg/m²


Temp. range dry: -40÷80 °C

Temp. range wet: -40÷65 °C


Pin material: PBT white

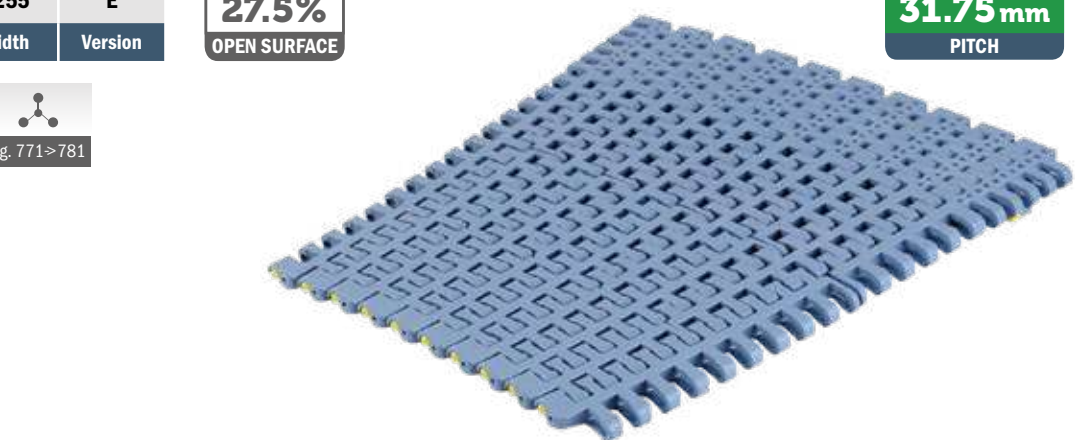

Internal Min Radius
2 times the width

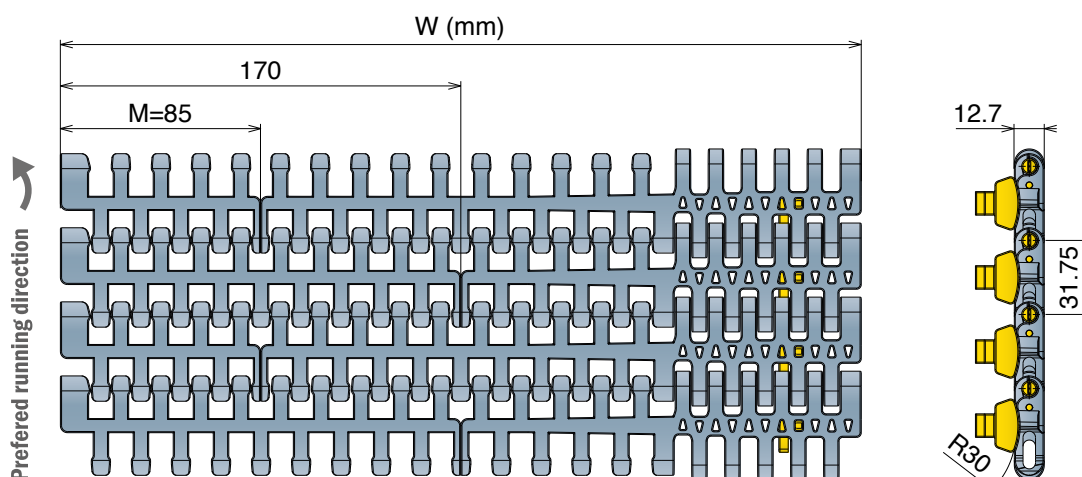

STANDARD



Series	Material	Width	Version	min radius
5422	*	0255	E	510
5422	*	0340	E	680
5422	*	0425	E	850
5422	*	0510	E	1020
5422	*	0595	E	1190
5422	*	0680	E	1360
5422	*	0765	E	1530
5422	*	0850	E	1700

TAB DKM Material

