

550 FTT

Tappeto Modulare 550 FTT, H=8,7 M=85

Modular Belt Series 550 FTT, H=8,7 M=85 / Modulare Mattenkette 550 FTT, H=8,7 M=85

CODE STRUCTURE GUIDE (Example)

Backflex radius min.: 25 mm

5506	01	0085	C
Series	*Material	Width	Version



pg. 362/363



pg. 771>781

* Material

LFA - Code 01	MX - Code 03
Low friction Acetal	Performance PBT


Max w. load:	30000 N/m	Max w. load:	24000 N/m
Weight:	8,5 kg/m ²	Weight:	8,2 kg/m ²
Temp. range dry:	-40÷80 °C	Temp. range dry:	-40÷120 °C
Temp. range wet:	-40÷65 °C	Temp. range wet:	-40÷60 °C
Pin material:	PBT white	Pin material:	POM grey




Pin Sphere®
AUTOLOCK

- Easier installation
- Quicker maintenance
- 100% interchangeable

25.4mm
PITCH

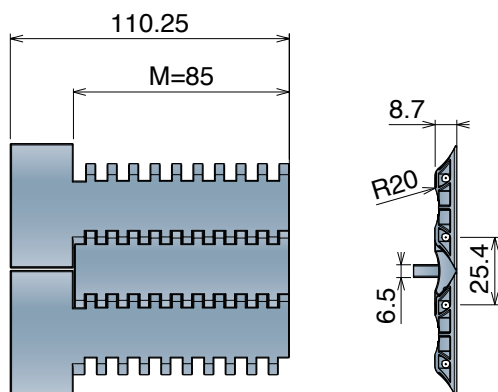

Version C




Version C

Series	Material	Width	Version
5506	*	0085	C

Max working load (N)

Width	85
LFA	2300
MX	1850

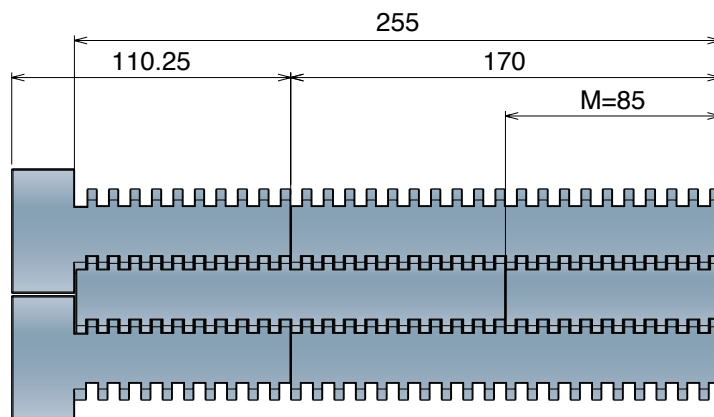

Version CN - Near



Version C0 - Opposite



Version CN - Near

Series	Material	Width	Version
5506	*	0170	CN
5506	*	0255	CN

Version C0 - Opposite

Series	Material	Width	Version
5506	*	0170	C0
5506	*	0255	C0