

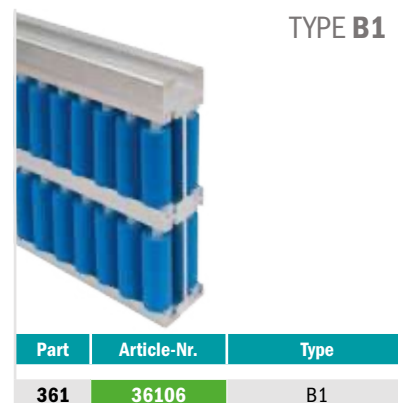
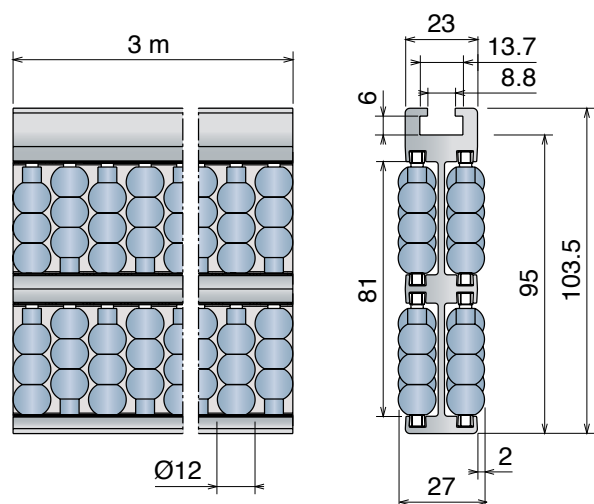

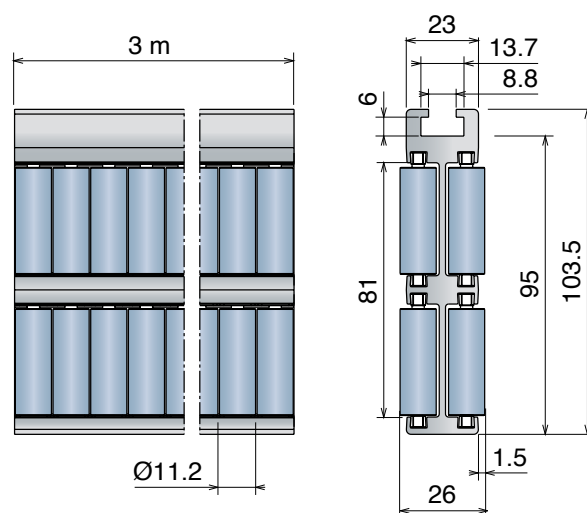
Materiale / Material / Materialien:

Guida: alluminio anodizzato/Guide: anodized aluminum/Führung: eloxiertem Aluminium
 Rulli: resina acetica o gomma SEBS/Rollers: Acetal Resin or SEBS rubber/Röllchen: Azetal
 oder SEBS gummi

361

Guide a rulli intermedia
Roller guides / Röllchenführung

Delivery: **Easy** **Standard** Max fixing load M8 screw: 15 N·m | Minimum internal/external radius: 610 mm

**Design TYPE A****Design TYPE B and B1**

These roller guides can be curved in either directions.

Bending machine and Rollers

Page 484>>486



Fixing screw:
M8 hex.head
or **PART 362**
Page 538

**Puntale / Shoe / Einlaufschuh**

Part	Article-Nr.	Type
367	36701	fresato/machined/gefräst

Discover more options:

Page 554/555

361

Guide a rulli intermedia
Roller guides / Röllchenführung

REINFORCED VERSION

Delivery: **Easy** **Standard** Max fixing load M8 screw: 15 N·m



TYPE A
Roller in
Acetal resin

Part	Article-Nr.	Type
361	36112	A



TYPE B
Roller in
Acetal resin

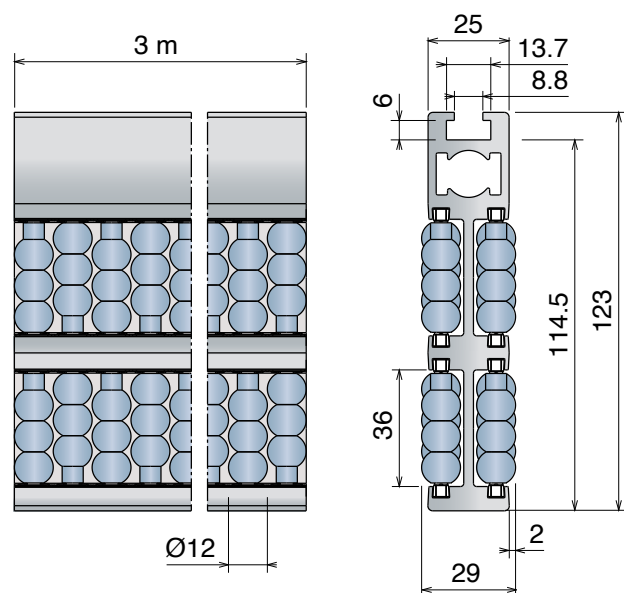
Part	Article-Nr.	Type
361	36114	B





TYPE B1
Soft roller in
SEBS rubber

Part	Article-Nr.	Type
361	36116	B1

Design TYPE A



Design TYPE B and B1

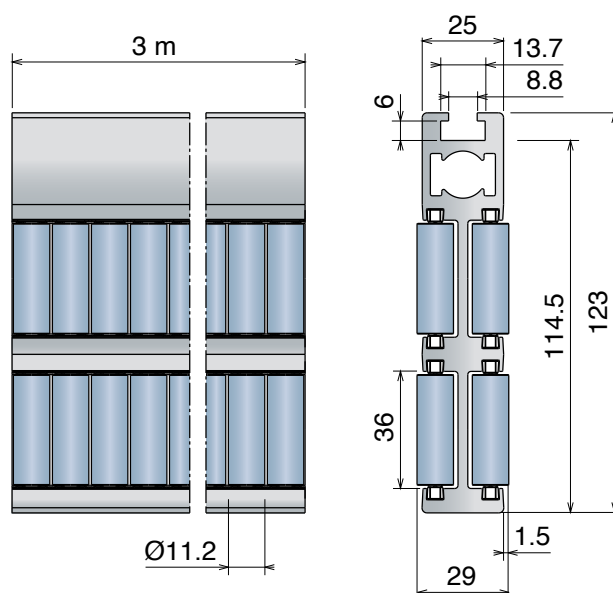

These roller guides can be curved in either directions.

Bending machine and Rollers
Page 484>>486



Fixing screw:
M8 hex.head or **PART 362**
Page 538



Puntale Shoe / Einlaufschuh



Part	Article-Nr.	Type
367	36701	fresato/machined/gefräst

Discover more options: Page 554/555

