


F Grub screw

Watertight bearings - solid version

Main features:

- Housing in reinforced polypropylene
- Stainless steel ball bearing (pre-lubricated)
- Stainless steel mounting hole spacers
- Nickel plated steel or SS grease nipple with self-forming thread M6
- Polypropylene open cap with O-ring seal & NBR top seal
- Washer for grease nipple in PE
- NBR bottom seal

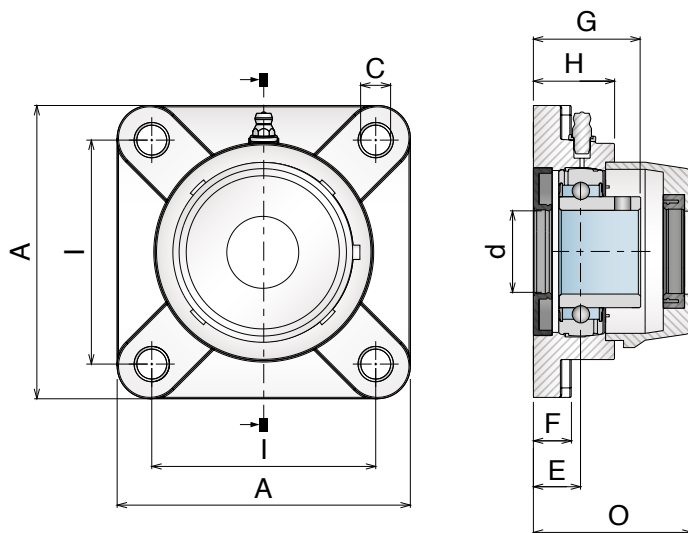

FIXING METHOD



GRUB SCREW

Stainless Steel

Article-Number	Series	d	I	A	C	E	F	G	H	O
○ 81430 ● 81430B	F 204	20	63,5	86	11	18	13,4	34,8	25,3	48,5
○ 81431 ● 81431B	F 205	25	70	95	11	17	14	35,8	28,5	51
○ 81432 ● 81432B	F 206	30	83	107	11	19,2	14,3	40,8	31,5	59
○ 81433 ● 81433B	F 207	35	92	118	13	21,5	15,5	42,8	34,4	62,5
○ 81434 ● 81434B	F 208	40	102	130	14	23	17	46,2	33,4	71

SS ProRun

Article-Number	Series	d	I	A	C	E	F	G	H	O
○ 81430L ● 81430BL	F 204	20	63,5	86	11	18	13,4	34,8	25,3	48,5
○ 81431L ● 81431BL	F 205	25	70	95	11	17	14	35,8	28,5	51
○ 81432L ● 81432BL	F 206	30	83	107	11	19,2	14,3	40,8	31,5	59
○ 81433L ● 81433BL	F 207	35	92	118	13	21,5	15,5	42,8	34,4	62,5
○ 81434L ● 81434BL	F 208	40	102	130	14	23	17	46,2	33,4	71