



UCFL-H

Locking collar


Watertight bearings - solid version

Main features:

- Housing in reinforced polypropylene & cover in SS
- Chrome steel ball bearing (pre-lubricated)
- Nickel-plated brass mounting hole spacers
- Nickel plated steel or SS grease nipple with self-forming thread M6
- Polypropylene open cap with O-ring seal & NBR top seal
- NBR bottom seal

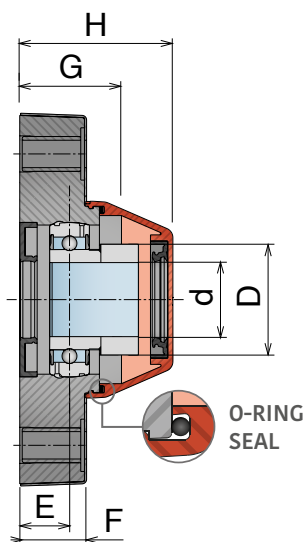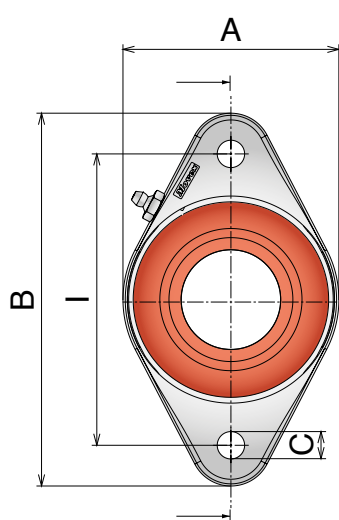

FIXING METHOD
(ECCENTRIC RING)



LOCKING COLLAR

Chrome Steel											
Article-Number	Series	d	I	A	B	C	D	E	F	G	H
82712H	UCFL-H 206	30	117	86,7	149,7	11	40,3	20	26,85	42	61,5
82703H	UCFL-H 207/117	35	117	94,7	149,7	11	48	19,5	26	43	66,5
82704H	UCFL-H 208/117	40	117	94,7	149,7	11	53	19	26,85	44	67