

359

Guide a rulli laterale Roller guides / Röllchenführung

Delivery: **Easy** **Standard** Max fixing load M8 screw: 15 N·m | Minimum internal/external radius: 508 mm

TYPE A
Roller in
Acetal resin



Part	Article-Nr.	Type
359	35902	A

TYPE B
Roller in
Acetal resin




Part	Article-Nr.	Type
359	35904	B

TYPE B1
Soft roller in
SEBS rubber





Part	Article-Nr.	Type
359	35906	B1

Design TYPE A

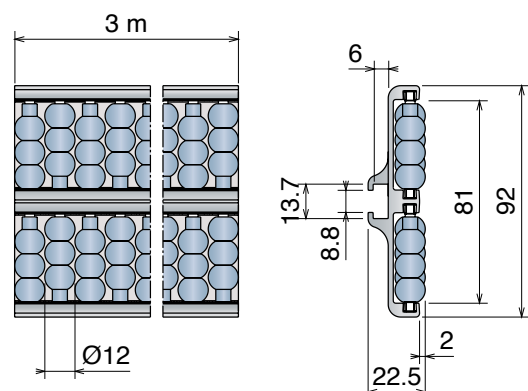

Design TYPE B and B1

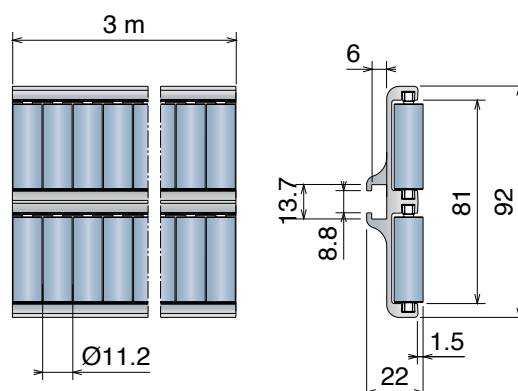

These roller guides can be curved in either directions.

Bending machine and Rollers
Page 484>>486



Fixing screw:
M8 hex.head
or **PART 362**
Page 538



Puntale / Shoe / Einlaufschuh



Part	Article-Nr.	Type
365	36501	fresato/machined/gefräst

Discover more options:
Page 554/555