

530 LBP

Tappeto Modulare 530 LBP, H=8,7 M=3"
Modular Belt Series 530 LBP, H=8,7 M=3" / Modulare Mattenkette 530 LBP, H=8,7 M=3"

CODE STRUCTURE GUIDE (Example)

Backflex radius min.: 25 mm

5324	01	0006	A
Series	*Material	Width	Version

		
pg. 359-360	pg. 309-313	pg. 771-781

SAMPLE BOX

Art.-Nr. 5324018888A



15.0mm
PITCH

Material

LFA - Code 01


Low friction Acetal

Max w. load: 24000 N/m
Weight: 9,0 kg/m²
Temp. range dry: -40+80 °C
Temp. range dry: -40+65 °C
Pin material: PBT white

POM Roller

Density: 700 rollers/m²


Version A - Standard

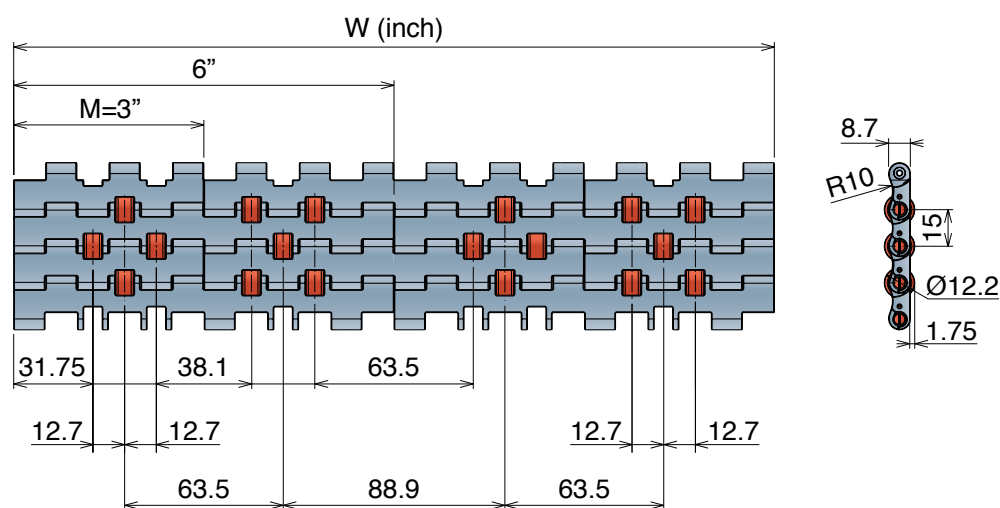

Version A - Standard


Series	Material	Width	Version
5324	01	0006	A
5324	01	0012	A
5324	01	0018	A
5324	01	0024	A
5324	01	0030	A
5324	01	0036	A
5324	01	0042	A
5324	01	0048	A
5324	01	0054	A

Guide position for accumulation system - Example

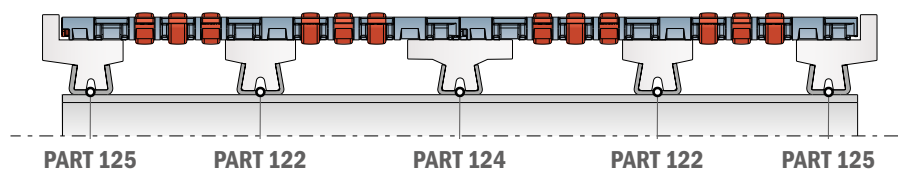

For accumulation system, please place the wear strips between the rollers (max 50 mm).

Guide position for driven rollers, for alignment/distribution system - Example

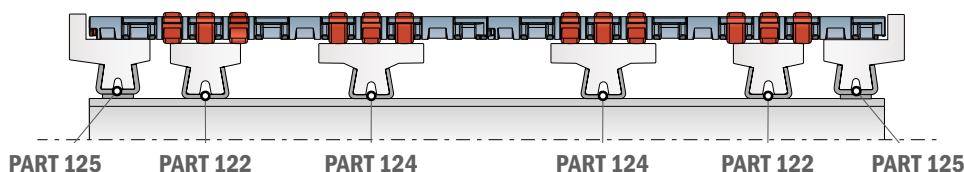

For driven rollers, please place the wear strips directly in contact under the rollers.

530 LBP can also be used with standard profiles: consult extruded profiles section for more details.