

NEW 521 FT

Tappeto Modulare 521 FT, H=8,7

Modular Belt Series 521 FT, H=8,7 / Modulare Mattenkette 521 FT, H=8,7

CODE STRUCTURE GUIDE (Example)

Backflex radius min.: 10 mm

5311	01	003	A
Series	*Material	Width	Version

		
pg. 355-356	308/311/314	pg. 771-781

*Material

LFA - Code 01

Low friction Acetal

Easy Delivery

Max w. load: 21500 N/m
 Weight: 8,0 kg/m²
 Temp. range dry: -40÷80 °C
 Temp. range wet: -40÷65 °C
 Pin material: PBT white

MX - Code 03

Performance PBT

Max w. load: 17500 N/m
 Weight: 7,8 kg/m²
 Temp. range dry: -40÷120 °C
 Temp. range wet: -40÷60 °C
 Pin material: POM grey

DKM - Code 16

Aramid Reinforced Acetal

Max w. load: 21500 N/m
 Weight: 8,0 kg/m²
 Temp. range dry: -40÷80 °C
 Temp. range wet: -40÷65 °C
 Pin material: PBT white

MWX - Code 17

Polyamide Composite

Max w. load: 21500 N/m
 Weight: 8,3 kg/m²
 Temp. range dry: -40÷104 °C
 Temp. range wet: NR
 Pin material: PBT white

MPX - Code 25

Lubricated Acetal


Max w. load: 2500 N
 Weight: 8,9 kg/m²
 Temp. range dry: -40÷104 °C
 Temp. range wet: NR
 Pin material: PBT white

PFX - Code 30


Extra performance PBT

Max w. load: 17500 N/m
 Weight: 7,8 kg/m²
 Temp. range dry: -40÷120 °C
 Temp. range wet: -40÷60 °C
 Pin material: POM grey

**THE BEST CHOICE FOR
 DRY RUNNING APPLICATIONS**



Version A - Standard

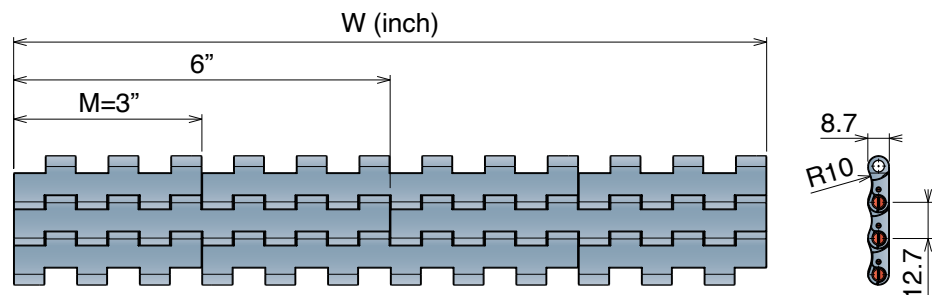

Version A - Standard

Series	Material	Width	Version
5311	01	0003	A
5311	01	0006	A
5311	01	0009	A
5311	01	0012	A
5311	01	0015	A
5311	01	0018	A
5311	01	0021	A
5311	01	0024	A
5311	01	0027	A
5311	01	0030	A
5311	01	0033	A
5311	01	0036	A
5311	01	0039	A
5311	01	0042	A
5311	01	0045	A
5311	01	0048	A
5311	01	0051	A
5311	01	0054	A