

Materiale / Material / Materialien:

Guida: alluminio anodizzato/Guide: anodized aluminum/Führung: eloxiertem Aluminium
 Rulli: resina acetica o gomma SEBS/Rollers: Acetal Resin or SEBS rubber/Röllchen: Azetal oder SEBS gummi

360

Guide a rulli intermedia Roller guides / Röllchenführung

Delivery: **Easy** **Standard** Max fixing load M8 screw: 15 N·m | Minimum internal/external radius: 610 mm

TYPE A
Roller in
Acetal resin



Part	Article-Nr.	Type
360	36002	A

TYPE B
Roller in
Acetal resin

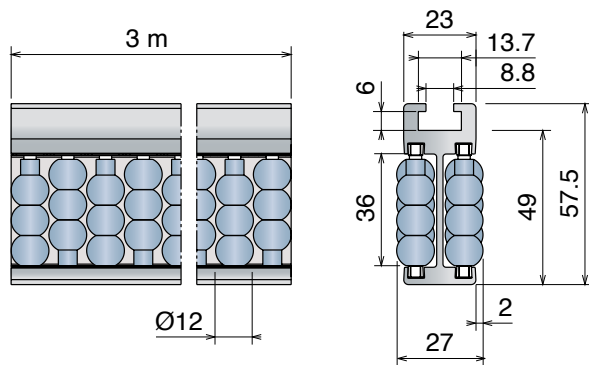

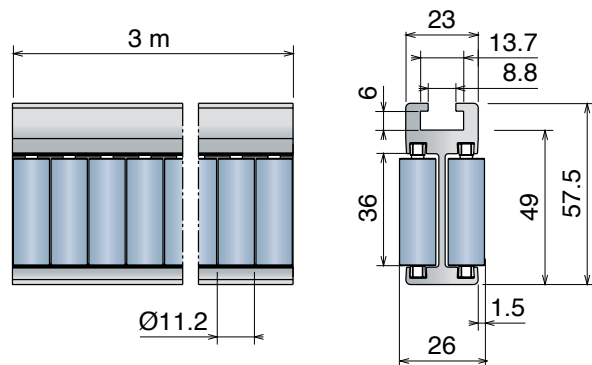


Part	Article-Nr.	Type
360	36004	B

TYPE B1
Soft roller in
SEBS rubber



Part	Article-Nr.	Type
360	36006	B1

Design TYPE A**Design TYPE B and B1**

These roller guides can be curved in either directions.

Bending machine and Rollers
Page 484>>486



Fixing screw:
M8 hex.head
or **PART 362**
Page 538

**Puntale / Shoe / Einlaufschuh**

Part	Article-Nr.	Type
366	36601	fresato/machined/gefräst

Discover more options:
Page 554/555