


UCFL *Grub screw*

Standard bearings - reinforced version

Main features:

- Housing in reinforced polyamide
- Chrome steel or stainless steel ball bearing (pre-lubricated)
- Nickel-plated brass mounting hole spacers
- Nickel plated steel or SS grease nipple with self-forming thread M6
- Stainless steel washers

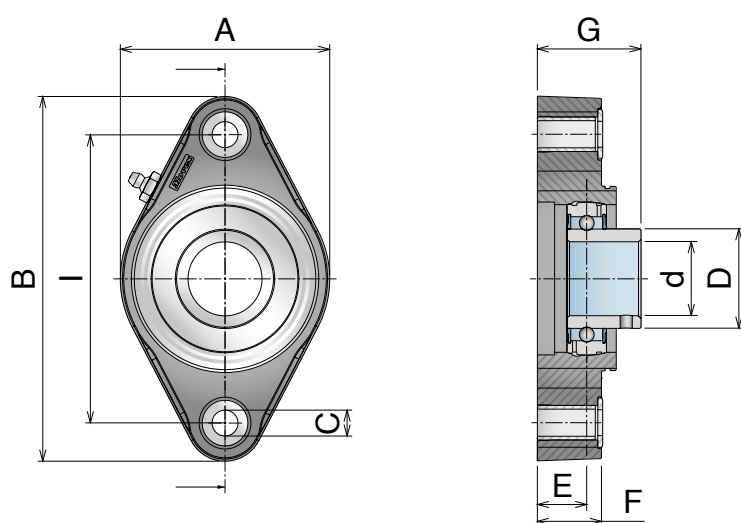

FIXING METHOD



GRUB SCREW

Chrome Steel		Stainless Steel										Caps (Accessories)	
Article-Number		Series	d	I	A	B	C	D	E	F	G	Close	Open
80110	80110SS	UCFL 204	20	90	62	116	11	29	16	20	34	89004	89054-20
80100	80100SS	UCFL 204/90		90	71	130	11	29	17,5	22,5	33,5	89001	89051-20
80121	80121SS	UCFL 205/90	25	90	85	116	11	34	14,5	20	34	89005	89055-25
80101	80101SS	UCFL 205/90		90	71	130	11	34	16,8	22,5	36,3	89001	89051-25
80111	80111SS	UCFL 205		99	71	130	11	34	16,8	22,5	36,3	89001	89051-25
80122	80122SS	UCFL 206/90	30	90	85	116	11	40,3	14,5	20	36,5	89005	89055-30
80132	80132SS	UCFL 206/99		99	85	130	11	40,3	20	26	42	89002	89052-30
80102	80102SS	UCFL 206/99		99	85	148	11	40,3	20	26	42	89002	89052-30
80112	80112SS	UCFL 206		117	85	148	11	40,3	20	26	42	89002	89052-30
80103	80103SS	UCFL 207/117	35	117	93	148	11	48	19,5	26	43	89003	89053-35
80123	80123SS	UCFL 207/117		117	112	148	11	48	19,5	26	43	89003	89053-35
80113	80113SS	UCFL 207		130	93	162	11	48	19,5	26	43	89003	89053-35
80104	80104SS	UCFL 208/117	40	117	93	148	11	53	19	26	44	89003	89053-40
80124	80124SS	UCFL 208/117		117	112	148	11	53	19	26	44	89003	89053-40
80114	80114SS	UCFL 208		130	93	162	11	53	19	26	44	89003	89053-40