

NEW

590 FG One track Belt


Tappeto Modulare 590 FG, H=8,7

Modular Belt Series 590 FG, H=8,7 / Modulare Mattenkette 590 FG, H=8,7

CODE STRUCTURE GUIDE (Example)


Backflex radius min.: 25 mm

5302	01	9330	A
Series	*Material	Width	Version



19.05mm
PITCH

Imperial Size



*Material

LFA - Code 01

Low friction Acetal

Easy Delivery

Max w. load: 30000 N/m
Weight: 6,5 kg/m²
Temp. range dry: -40÷80 °C
Temp. range wet: -40÷65 °C
Pin material: PBT white

MX - Code 03

Performance PBT

Max w. load: 24000 N/m
Weight: 6,0 kg/m²
Temp. range dry: -40÷120 °C
Temp. range wet: -40÷60 °C
Pin material: POM grey

LFB - Code 23

Low friction Acetal

Max w. load: 30000 N/m
Weight: 6,5 kg/m²
Temp. range dry: -40÷80 °C
Temp. range wet: -40÷65 °C
Pin material: PBT white


PFX - Code 30

Extra performance PBT



Max w. load: 24000 N/m
Weight: 6,0 kg/m²
Temp. range dry: -40÷120 °C
Temp. range wet: -40÷60 °C
Pin material: POM grey

**THE BEST CHOICE FOR
DRY RUNNING APPLICATIONS**

Version A - Standard




Version C - With 2 Positioner

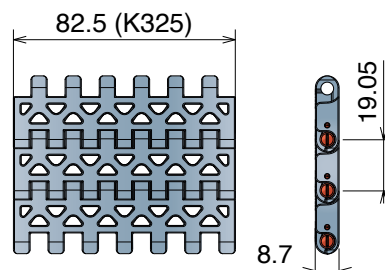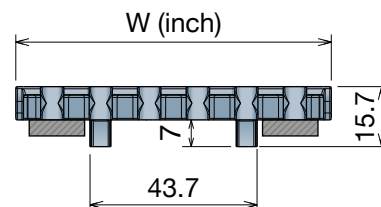


K325 - One track belt

Series	Material	Width	Version
5302	*	9325	A
5302	*	9325	C

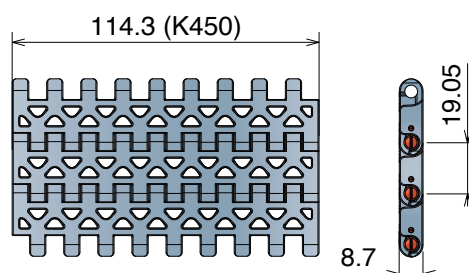

K450 - One track belt

Series	Material	Width	Version
5302	*	9450	A
5302	*	9450	C

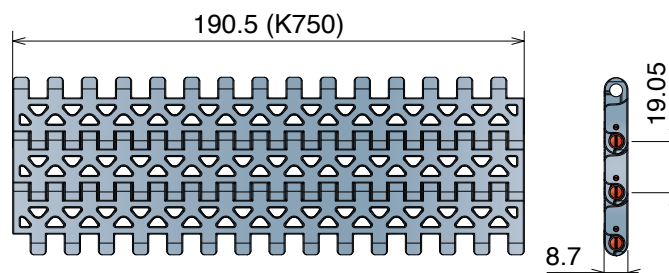

K750 - One track belt

Series	Material	Width	Version
5302	*	9750	A
5302	*	9750	C