

Material: Resina acetica / Acetal Resin / Azetal or **BluLub**.
Polyethylene UHMW-PE with reduced coefficient of friction and higher wear resistance.
BluLub complies with the code of Federal Regulations of FDA. Linear expansion coefficient:
 $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$) Operating temperature: -40 to 176°F (-40 to +80°C)

396

Guida a rulli flessibile
Flexible roller guide / Flexible Röllchenführung

RANGE EXTENSION


Delivery: **Easy** **Standard**

Part	Article-Nr.	Type	A	Colour
396	39601	A	8	White
396	39602	B	8	White
363	39604	A	10	White
363	39605	B	10	White
363	39603	A	8	BluLub
363	39606	A	10	BluLub




Try with...
BluLub
Rollers!

- Lower wear
- Noise reduction
- Improved product stability
- Lower coefficient of friction
- Less energy consumption

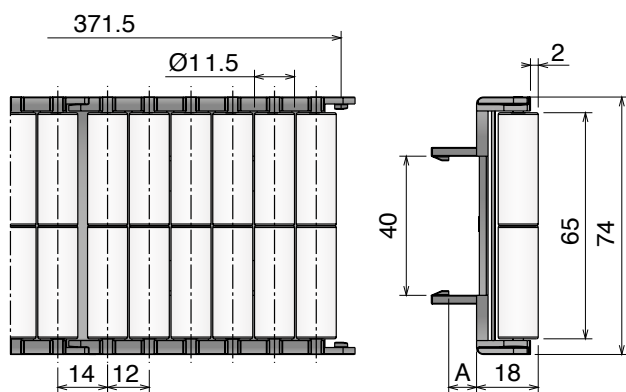


TYPE A

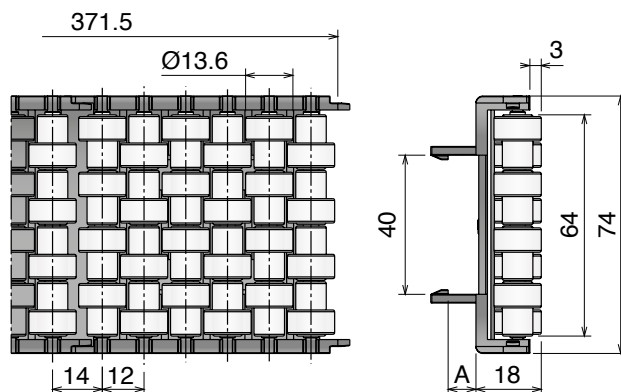

TYPE B


Curvature radius

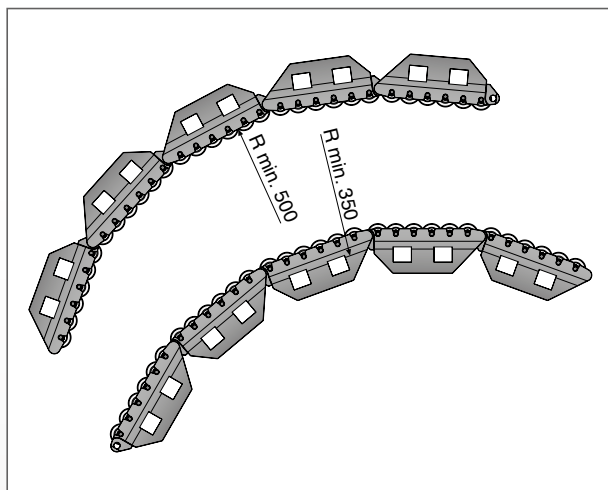

Fixing with plate and metal profile

Fixing with plate:

40x8



Fixing with Metal:

Part 117
Page 466