

520 M

Tappeto Modulare 520 M, H=8,7 K 330

Modular Belt Series 520 M, H=8,7 K 330 / Modulare Mattenkette 520 M, H=8,7 K 330

Part	Article-Nr.	Ref.	Weight Kg/m	*Material
1193	1195019330	LFA 520 M K330	1,11	LFA
1193	1195039330	MX 520 M K330	1,11	MX
1193	1195309330	PFX 520 M K330	1,11	PFX

Backflex radius min.: 15 mm

12.7mm
PITCH

10 feet 3.048 m	pg. 357-358	NoseBars 307/311/314	pg. 163->169	pg. 771->781
240 links				

SAMPLE BOX

Art.-Nr. 1195018888A

MAGNETIC SYSTEM

Pin Sphere®
AUTOLOCK

- Easier installation • Quicker maintenance
- Interchangeable with previous design

*Material

LFA - Code 01

Low friction Acetal

Easy Delivery

Max w. load: 2500 N
 Temp. range dry: -40÷80 °C
 Temp. range wet: -40÷65 °C
 Pin: Ferritic stainless steel

MX - Code 03

Performance PBT

Max w. load: 2000 N
 Temp. range dry: -40÷120 °C
 Temp. range wet: -40÷60 °C
 Pin: Ferritic stainless steel


PFX - Code 30

Extra performance PBT

Max w. load: 2000 N
 Temp. range dry: -40÷120 °C
 Temp. range wet: -40÷60 °C
 Pin: Ferritic stainless steel

THE BEST CHOICE FOR
 DRY RUNNING APPLICATIONS


Version A - Standard

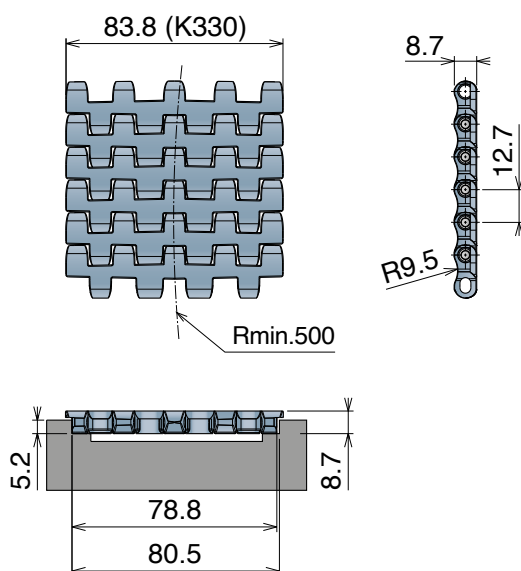


Advantages:

- No conveyor side transfers required
- Space savings
- Less components required
- Less drives required

Coventional layout

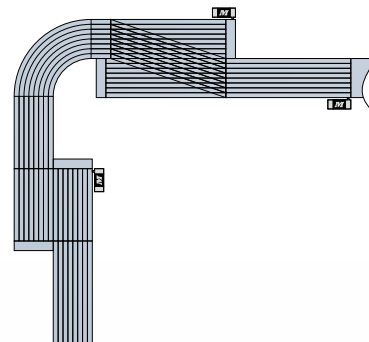

Layout with 520 M K330

520 M
MOVEX TOOL

The specific tool for 520 M developed
 to facilitate belt assembly and disassembly.



Article Nr. 29968

Movex tools are made with 3D printer, the color may vary due to availability of the material.