

7220 GT *Grip Top* Tappeto Modulare 7220 GT, H=10 M=50

Backflex radius min.: 7.5 mm | Pin diameter: 5 mm



Page 24


Metric Size



Pin Sphere®
AUTOLOCK

- Easier installation
- Quicker maintenance

Width* (mm)
0050
0100
0150
0200
0250
0300
0350
0400
0450
0500
0550
0600
0650
0700
0750
0800
0850
0900

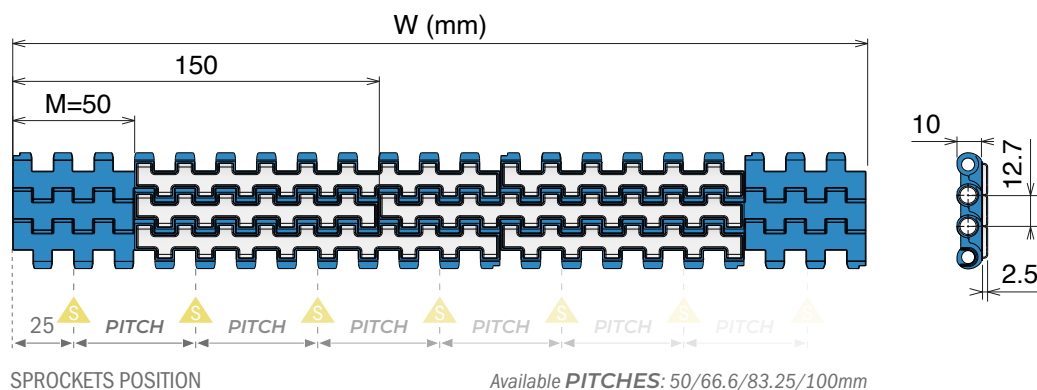

Belt Material			
POM - Acetal resin			
Belt Colors			
RAL 5005	Cyan		
White			
Pins Available			
PBT Pin	PP Pin		
Max w. load:	18000 N/m	Max w. load:	16000 N/m
Weight:	10.6 kg/m²	Weight:	10.0 kg/m²
Temp. range:	-40+80 °C	Temp. range:	+5+93 °C

Belt Material	
PP - Polypropylene	
Belt Colors	
RAL 5005	Cyan
White	
Pins Available	
PP Pin	
Max w. load:	11000 N/m
Weight:	7.5 kg/m²
Temp. range:	0+100 °C

***Belts wider than standard are available with 50 mm increments.**

The nominal tensile strength and the nominal width tolerance are valid for a temperature of 23°C (73 °F).

The actual width of the belt typically falls below the nominal value by 0.1% to 0.3%.

For POM belts up to 750 mm (30") in width, the shrinkage ranges from -3 mm to 0 mm, and for those wider, from -0.35% to 0.1%.

For PP belts up to 750 mm (30") in width, the decrease is between -1 mm and 2 mm, with the reduction for wider belts ranging from 0% to 0.4%.

Non-Standard belt widths are incremented by 16.65 mm (0.66"). The minimum width is 50 mm (2").

Non-bricklaid belts are available in widths of 50 mm (2"), 100 mm (4") and 200 mm (8").