

Materiale / Material / Materialien:

Guida: alluminio anodizzato/Guide: anodized aluminum/Führung: eloxiertem Aluminium

Rulli: resina acetica o gomma SEBS/Rollers: Acetal Resin or SEBS rubber/Röllchen: Azetal oder SEBS gummi

Vite: Acciaio inox/Screw: Stainless steel/Schrauben: Edelstahl

358

Guide a rulli laterale
Roller guides / RöllchenführungDelivery: **Easy** **Standard** Max fixing load M8 screw: 15 N·m | Minimum internal/external radius: 460 mm**TYPE A**
Roller in
Acetal resin

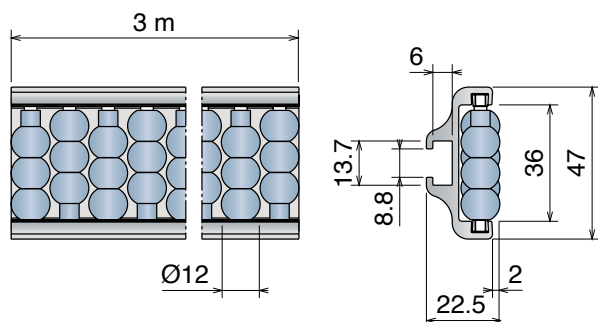

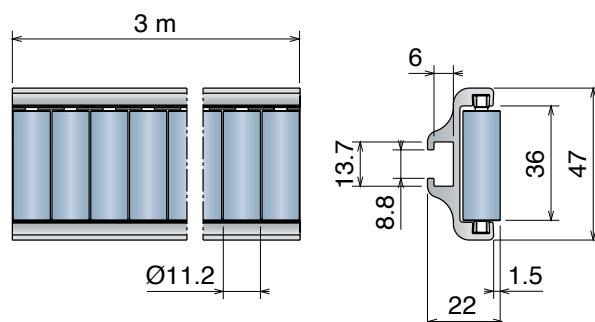
Part	Article-Nr.	Type
358	35802	A

**TYPE B**
Roller in
Acetal resin

Part	Article-Nr.	Type
358	35804	B

**TYPE B1**
Soft roller in
SEBS rubber

Part	Article-Nr.	Type
358	35806	B1

Design TYPE A**Design TYPE B and B1**

These roller guides
can be curved in either
directions.

**Bending machine
and Rollers**

Page 484>>486



Fixing screw:
M8 hex.head
or **PART 362**
Page 538

**Puntale / Shoe / Einlaufschuh**

Part	Article-Nr.	Type
364	36401	fresato/machined/gefräst

Discover more options:

Page 554/555