

ZERO CONTACT PRO

Tappeto Modulare Curvilineo Zero Contact PRO, H=9

Side Flex Modular Belt Zero Contact PRO, H=9 / Kurvgängige Mattenkette Zero Contact PRO, H=9

	Zero contact Pro Curve	
pg. 375	pg. 328>331	pg. 771>781

SAMPLE BOX

Art.-Nr. **5999999925A**

Material

PA - Code 28

Glass fiber reinforced

Max w. load: 19000 N/m
Weight: 9,25 kg/m²
Temp. range dry: -30÷100 °C
Temp. range wet: N.R.
Pin: Stainless steel

Features

Inner radius: 586 mm ÷ 1541 mm

Belt width: 249 mm ÷ 1034 mm



Angle: 90° and 180° (different on request)

Row to row angle: 1°

Pin: Ø4 mm, material 1.4301

Open Area: 0%

ZERO CONTACT
SIDE FLEX MODULAR BELT

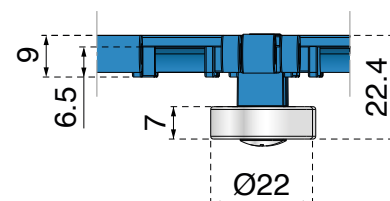

Side Flex Modular Belt Zero Contact PRO™ 90° | Without bearings | Length of the belt 200 modules

Order code	R _i - mm	W - mm	Order code	R _i - mm	W - mm	Order code	R _i - mm	W - mm
5461280439A-M	586	439	5462281034A-M	756	1034	5464280504A-M	1116	504
5461280524A-M	586	524	5463280269A-M	1011	269	5465280419A-M	1201	419
5461280864A-M	586	864	5463280439A-M	1011	439	5466280249A-M	1286	249
5461281034A-M	586	1034	5463280524A-M	1011	524	5465280504A-M	1286	504
5462280269A-M	756	269	5463280864A-M	1011	864	5466280419A-M	1456	419
5462280439A-M	756	439	5463281034A-M	1011	1034	5466280504A-M	1541	504
5462280524A-M	756	524	5465280249A-M	1031	249			
5462280864A-M	756	864	5464280419A-M	1031	419			

Side Flex Modular Belt Zero Contact PRO™ 90° | With bearings | Length of the belt 200 modules

Order code	R _i - mm	W - mm	Order code	R _i - mm	W - mm
5462280249A-M	1031	249	5463280249A-M	1286	249
5461280419A-M	1031	419	5462280504A-M	1286	504
5461280504A-M	1116	504	5463280419A-M	1456	419
5462280419A-M	1201	419	5463280504A-M	1541	504




Side Flex Modular Belt Zero Contact PRO™ 90° | Two track combinations | Length of the belts 200 modules

Track 1 - Order code	R _i - mm	W - mm	Track 2 - Order code	R _i - mm	W - mm	Total width
5462280269A-M	756	269	+ 5462280249A-M	1031	249	= 524
5463280269A-M	1011	269	+ 5463280249A-M	1286	249	= 524
5461280439A-M	586	439	+ 5461280419A-M	1031	419	= 864
5462280439A-M	756	439	+ 5462280419A-M	1201	419	= 864
5463280439A-M	1011	439	+ 5463280419A-M	1456	419	= 864
5461280524A-M	586	524	+ 5461280504A-M	1116	504	= 1034
5462280524A-M	756	524	+ 5462280504A-M	1286	504	= 1034
5463280524A-M	1011	524	+ 5463280504A-M	1541	504	= 1034

The gap between the belts is 6 mm. | Track 1 belt is supplied without bearings. | Track 2 belt is supplied with bearings.

ZERO CONTACT

SIDE FLEX MODULAR BELT



Side Flex Modular Belt Zero Contact PRO™ 180° | Without bearings | Length of the belt 380 modules

Order code	R _i - mm	W - mm	Order code	R _i - mm	W - mm	Order code	R _i - mm	W - mm
5461280439B-M	586	439	5462281034B-M	756	1034	5464280504B-M	1116	504
5461280524B-M	586	524	5463280269B-M	1011	269	5465280419B-M	1201	419
5461280864B-M	586	864	5463280439B-M	1011	439	5466280249B-M	1286	249
5461281034B-M	586	1034	5463280524B-M	1011	524	5465280504B-M	1286	504
5462280269B-M	756	269	5463280864B-M	1011	864	5466280419B-M	1456	419
5462280439B-M	756	439	5463281034B-M	1011	1034	5466280504B-M	1541	504
5462280524B-M	756	524	5465280249B-M	1031	249			
5462280864B-M	756	864	5464280419B-M	1031	419			

Side Flex Modular Belt Zero Contact PRO™ 180° | With bearings | Length of the belt 380 modules

Order code	R _i - mm	W - mm	Order code	R _i - mm	W - mm
5462280249B-M	1031	249	5463280249B-M	1286	249
5461280419B-M	1031	419	5462280504B-M	1286	504
5461280504B-M	1116	504	5463280419B-M	1456	419
5462280419B-M	1201	419	5463280504B-M	1541	504



Side Flex Modular Belt Zero Contact PRO™ 180° | Two track combinations | Length of the belts 380 modules

Track 1 - Order code	R _i - mm	W - mm	Track 2 - Order code	R _i - mm	W - mm	Total width
5462280269B-M	756	269	+ 5462280249B-M	1031	249	= 524
5463280269B-M	1011	269	+ 5463280249B-M	1286	249	= 524
5461280439B-M	586	439	+ 5461280419B-M	1031	419	= 864
5462280439B-M	756	439	+ 5462280419B-M	1201	419	= 864
5463280439B-M	1011	439	+ 5463280419B-M	1456	419	= 864
5461280524B-M	586	524	+ 5461280504B-M	1116	504	= 1034
5462280524B-M	756	524	+ 5462280504B-M	1286	504	= 1034
5463280524B-M	1011	524	+ 5463280504B-M	1541	504	= 1034

The gap between the belts is 6 mm. | Track 1 belt is supplied without bearings. | Track 2 belt is supplied with bearings.

The innovative design of **Movex® Zero Contact™ PRO** is recommended for high speed, heavy loads and transportation of abrasive substances, like sand, salt, sugar, and many other applications.

The stainless steel pins guarantee a higher working load and due to the new pin retention with grub screw, the assembly of this belt is 100% secure.

The robust structure of **Zero Contact™ PRO** can be summarized in minimal maintenance, long life expectation and high reliability.

Zero Contact™ PRO is a versatile belt, allowing a wider range of available widths and radii. Find out also our “two-tracks” version.



Extreme speed



Heavy duty



High abrasion resistance