


100%
GUARANTEED
TRANSFER!

ZERO^{PRO} ATP[®]

ACTIVE TRANSFER PLATE

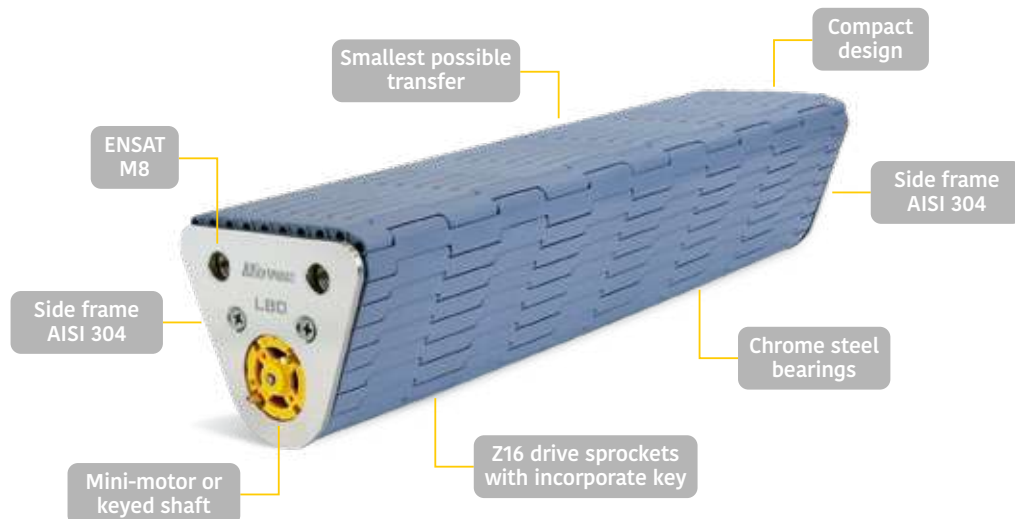


Product use

Zero ATP Pro[®] equipped with micro-pitch 7870 modular belt series, is the smallest Active Transfer Plate available on the market.

With its revolutionary compact shape, Zero ATP Pro[®] is the right choice to connect different conveyors, guaranteeing a smooth product transfer, that can be easily integrated into existing lines by replacing traditional transfers, with limited structural work.

Zero ATP Pro[®] can be provided with mini-motor or key shaft for a roller chain drive and it's a maintenance and tensioning free system.

DIFFERENT BELT SURFACE AVAILABLE ON REQUEST

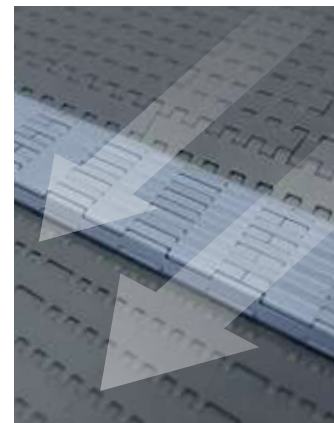

BELT SERIES 7870 FT

BELT WIDTH 6in ÷ 24in (152,4mm ÷ 609,6mm)

BELT DIMENSIONS Pitch 8mm Thickness 6mm


MATERIAL OF MODULES LFA, MX and LFB

TRANSFER LENGTH 80mm or 150mm

TRANSMISSION Mini motor or Keyed shaft

MAX. WORKING LOAD 3.000 N/m belt width

SIMULTANEOUS TRANSPORT OF:



LIGHTWEIGHT & SMALL GOODS



HIGH LOAD & BIG GOODS

Plug-in & Play solution | Maintenance free | Self-tensioning

For different configurations and 7870 modular belt surface (Flush grid, Diamond top, Cone top, Non slip), please contact your sales representative.

Zero ATP Pro[®]

Mini motor version



Mini-motor version

Includes a mini-motor assembled at the inside of the module.

Optional cover for motor connection



Article-Nr. 300601

Mini-motor features:

Supply voltage 6-15 V dc | Power Rating 7.85W

Max Torque 6539 g.cm.



Transfer length 80mm

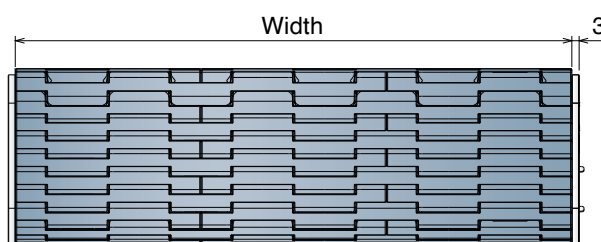

Series	Material	Width	Version
5336	*	0006	A
5336	*	0009	A
5336	*	0012	A
5336	*	0015	A
5336	*	0018	A
5336	*	0021	A
5336	*	0024	A

* Material			
LFA - Code 01 Low friction Acetal		MX - Code 03 Performance PBT	
		LFB - Code 23 Low friction Acetal	
Max w. load:	3000 N	Max w. load:	2700 N
Weight:	5,8 kg/m ²	Weight:	5,5 kg/m ²
Temp. range dry:	-40÷80 °C	Temp. range dry:	-40÷120 °C
Temp. range wet:	-40÷65 °C	Temp. range wet:	-40÷60 °C
Pin material:	PBT white	Pin material:	POM grey

Transfer length 150mm - IMPROVED DESIGN

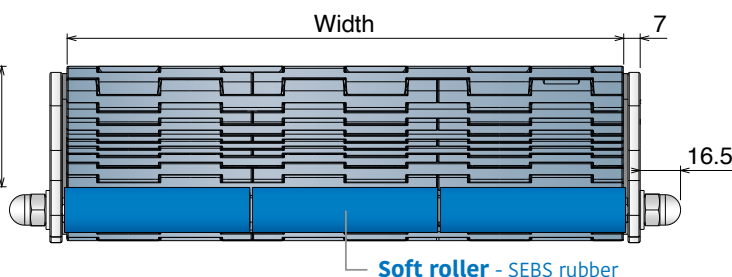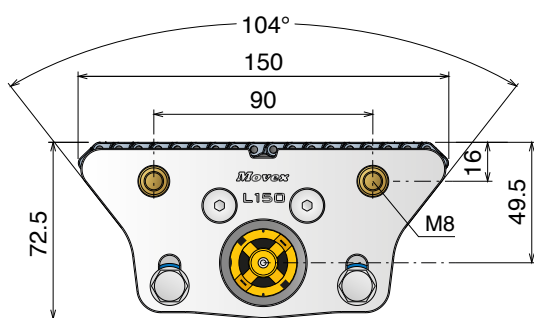

Series	Material	Width	Version
5338	*	0006	A
5338	*	0009	A
5338	*	0012	A
5338	*	0015	A
5338	*	0018	A
5338	*	0021	A
5338	*	0024	A

* Material			
LFA - Code 01 Low friction Acetal		MX - Code 03 Performance PBT	
		LFB - Code 23 Low friction Acetal	
Max w. load:	3000 N	Max w. load:	2700 N
Weight:	5,8 kg/m ²	Weight:	5,5 kg/m ²
Temp. range dry:	-40÷80 °C	Temp. range dry:	-40÷120 °C
Temp. range wet:	-40÷65 °C	Temp. range wet:	-40÷60 °C
Pin material:	PBT white	Pin material:	POM grey

For different configurations and 7870 modular belt surface (Flush grid, Diamond top, Cone top, Non slip), please contact your sales representative.

Zero ATP Pro®



Keyed shaft version



Keyed shaft version

Includes a 15 mm shaft with standard key seat 5x5 for roller chain transmission.



Transfer length 80mm

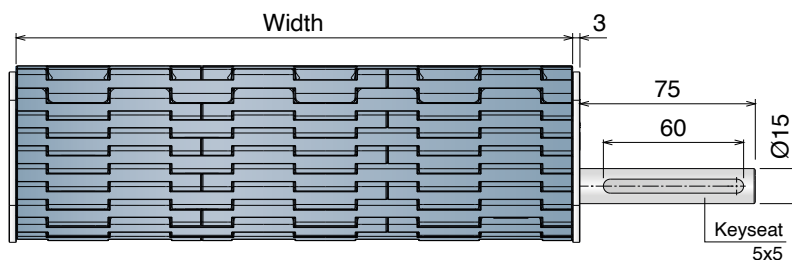

Series	Material	Width	Version
5336	*	0006	B
5336	*	0009	B
5336	*	0012	B
5336	*	0015	B
5336	*	0018	B
5336	*	0021	B
5336	*	0024	B

* Material			
LFA - Code 01 Low friction Acetal		MX - Code 03 Performance PBT	
		LFB - Code 23 Low friction Acetal	
Max w. load:	3000 N	Max w. load:	2700 N
Weight:	5,8 kg/m ²	Weight:	5,5 kg/m ²
Temp. range dry:	-40÷80 °C	Temp. range dry:	-40÷120 °C
Temp. range wet:	-40÷65 °C	Temp. range wet:	-40÷60 °C
Pin material:	PBT white	Pin material:	POM grey

Transfer length 150mm - IMPROVED DESIGN

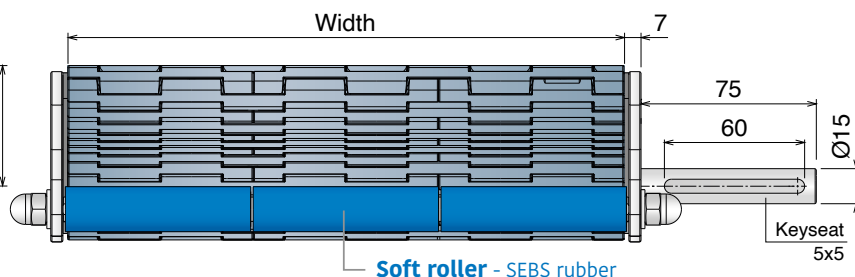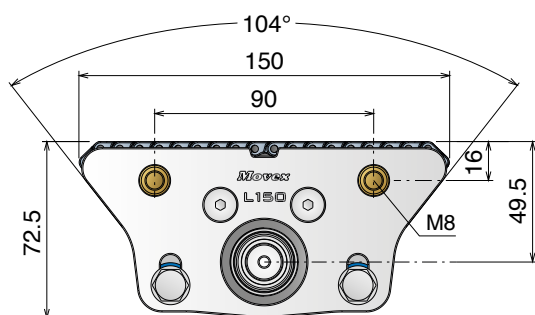

Series	Material	Width	Version
5338	*	0006	B
5338	*	0009	B
5338	*	0012	B
5338	*	0015	B
5338	*	0018	B
5338	*	0021	B
5338	*	0024	B

* Material			
LFA - Code 01 Low friction Acetal		MX - Code 03 Performance PBT	
		LFB - Code 23 Low friction Acetal	
Max w. load:	3000 N	Max w. load:	2700 N
Weight:	5,8 kg/m ²	Weight:	5,5 kg/m ²
Temp. range dry:	-40÷80 °C	Temp. range dry:	-40÷120 °C
Temp. range wet:	-40÷65 °C	Temp. range wet:	-40÷60 °C
Pin material:	PBT white	Pin material:	POM grey

For different configurations and 7870 modular belt surface (Flush grid, Diamond top, Cone top, Non slip), please contact your sales representative.