


UCFL Locking collar


Watertight bearings - reinforced version

Main features:

- Housing in reinforced polyamide
- Chrome steel ball bearing (pre-lubricated)
- Nickel-plated brass mounting hole spacers
- Nickel plated steel or SS grease nipple with self-forming thread M6
- Polypropylene open cap with O-ring seal & NBR top seal
- Stainless steel washers
- NBR bottom seal

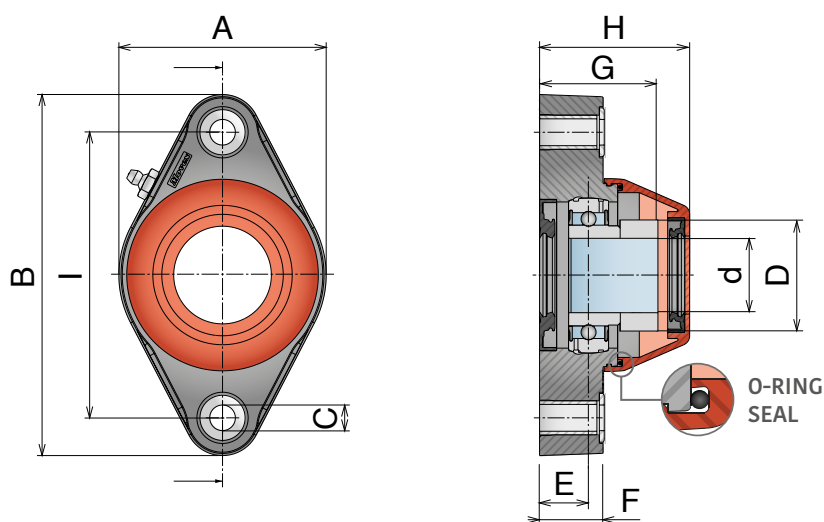

FIXING METHOD
(ECCENTRIC RING)



LOCKING COLLAR

Chrome Steel											
Article-Number	Series	d	I	A	B	C	D	E	F	G	H
80610	UCFL 204	20	90	62	116	11	33,3	16	20	39,9	51,5
80600	UCFL 204		90	71	130	11	33,3	17,5	22,5	41,4	52
80621	UCFL 205/90	25	90	85	116	11	38,1	14,5	20	37,9	55,5
80601	UCFL 205/90		90	71	130	11	38,1	16,8	22,5	40,2	52
80611	UCFL 205		99	71	130	11	38,1	16,8	22,5	40,2	52
80622	UCFL 206/90	30	90	85	116	11	44,5	14,5	20	42,2	55,5
80632	UCFL 206/99		99	85	130	11	44,5	20	26	47,7	61,5
80602	UCFL 206/99		99	85	148	11	44,5	20	26	47,7	61,5
80612	UCFL 206		117	85	148	11	44,5	20	26	47,7	61,5
80603	UCFL 207/117	35	117	93	148	11	55,6	19,5	26	49,9	66,5
80623	UCFL 207/117		117	112	148	11	55,6	19,5	26	49,9	66,5
80613	UCFL 207		130	93	162	11	55,6	19,5	26	49,9	66,5
80604	UCFL 208/117	40	117	93	148	11	60,3	19	26	53,7	66,5
80624	UCFL 208/117		117	112	148	11	60,3	19	26	53,7	66,5
80614	UCFL 208		130	93	162	11	60,3	19	26	53,7	66,5