

525 FTT

Tappeto Modulare 525 FTT, H=8,7 M=85

Modular Belt Series 525 FTT, H=8,7 M=85 / Modulare Mattenkette 525 FTT, H=8,7 M=85

CODE STRUCTURE GUIDE (Example)

Backflex radius min.: 25 mm

5256	01	0085	C
Series	*Material	Width	Version

		
pg. 359-360	307/311/314	pg. 771>781


*Material

LFA - Code 01	MX - Code 03
Low friction Acetal	Performance PBT


Max w. load:	21500 N/m	Max w. load:	17500 N/m
Weight:	7,8 kg/m ²	Weight:	7,5 kg/m ²
Temp. range dry:	-40÷80 °C	Temp. range dry:	-40÷120 °C
Temp. range wet:	-40÷65 °C	Temp. range wet:	-40÷60 °C
Pin material:	PBT white	Pin material:	POM grey

15.0mm
PITCH

Metric Size

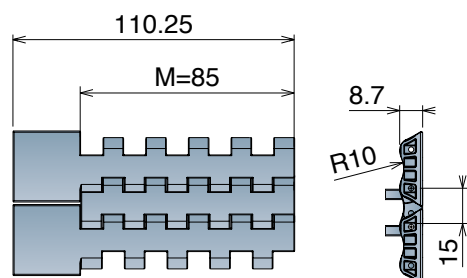

Version C




Version C


Series	Material	Width	Version
5256	*	0085	C

Max working load (N)

Width	85
LFA	1850
MX	1500

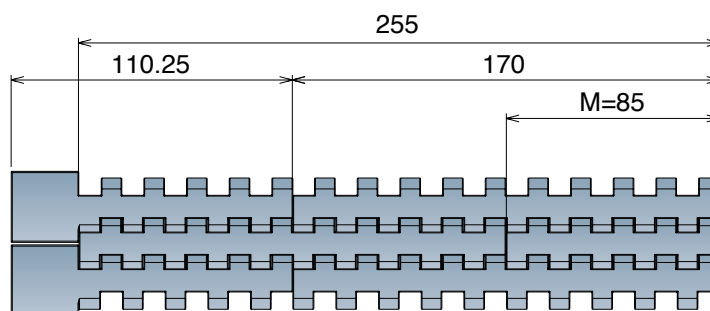

Version CN - Near

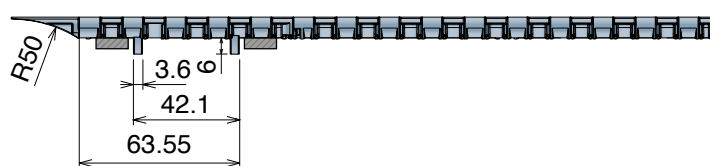

Version C0 - Opposite



Version CN - Near

Series	Material	Width	Version
5256	*	0170	CN
5256	*	0255	CN

Version C0 - Opposite

Series	Material	Width	Version
5256	*	0170	C0
5256	*	0255	C0