

7520 FG *Flush Grid* Tappeto Modulare 7520 FG, H=10 M=50

Modular Belt Series 7520 FG, H=10 M=50 / Modulare Mattenkette 7520 FG, H=10 M=50

Backflex radius min.: 35 mm | Pin diameter: 5 mm



pg. 42/43

A

Accessories

pg. 27



pg. 269>286

42.0%
OPEN SURFACE25.4mm
PITCH

Width* (mm)

0050

0100

0150

0200

0250

0300

0350

0400

0450

0500

0550

0600

0650


0700

0750

0800

0850

0900

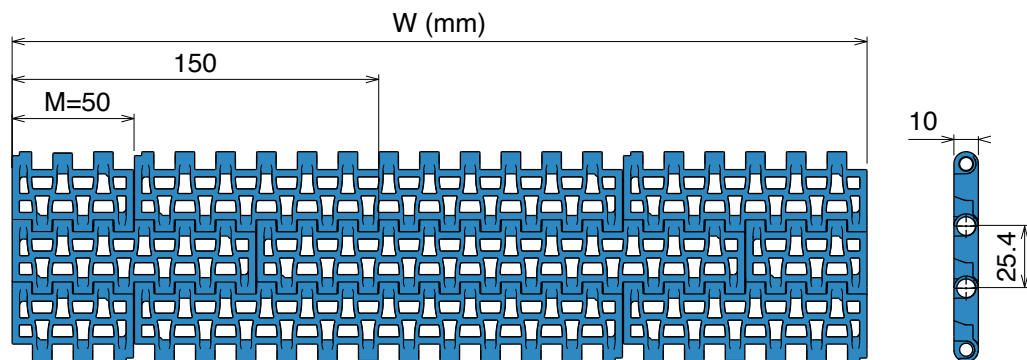

BELT MATERIAL

PE - Polyethylene

BELT COLORS

RAL 5005

Cyan

White

Natural

PINS AVAILABLE

PBT Pin

Max w. load: 8000 N/m
Weight: 5.2 kg/m²
Temp. range: -40+65 °C

PA6 Pin

Max w. load: 8000 N/m
Weight: 5.2 kg/m²
Temp. range: -40+65 °C

PE Pin

Max w. load: 8000 N/m
Weight: 5.2 kg/m²
Temp. range: -70+65 °C

PP Pin

Max w. load: 8000 N/m
Weight: 5.2 kg/m²
Temp. range: 0+65 °C

BELT MATERIAL

POM - Acetal resin

BELT COLORS

RAL 5005

Cyan

White

PINS AVAILABLE

PBT Pin

Max w. load: 60000 N/m
Weight: 7.2 kg/m²
Temp. range: -40+80 °C

PA6 Pin

Max w. load: 24700 N/m
Weight: 7.2 kg/m²
Temp. range: -40+93 °C

PE Pin

Max w. load: 15000 N/m
Weight: 7.2 kg/m²
Temp. range: -40+65 °C

PP Pin

Max w. load: 18000 N/m
Weight: 7.2 kg/m²
Temp. range: +5+93 °C

BELT MATERIAL

PP - Polypropylene

BELT COLORS

RAL 5005

Cyan

White

PINS AVAILABLE

PBT Pin

Max w. load: 45000 N/m
Weight: 5.0 kg/m²
Temp. range: 0+100 °C

PA6 Pin

Max w. load: 21000 N/m
Weight: 5.0 kg/m²
Temp. range: 0+80 °C

PE Pin

Max w. load: 12000 N/m
Weight: 5.0 kg/m²
Temp. range: 0+65 °C

PP Pin

Max w. load: 14000 N/m
Weight: 5.0 kg/m²
Temp. range: 0+100 °C

***Belts wider than standard are available with 50 mm increments.**

The nominal tensile strength and the nominal width tolerance are valid for a temperature of 23°C (73 °F).

The actual width of the belt typically falls below the nominal value by 0.1% to 0.3%.

For PE belts up to 750 mm (30") in width, the reduction ranges from -5 mm to -1 mm, and for widths beyond that, from -0.8% to -0.3%.

For POM belts up to 750 mm (30") in width, the shrinkage ranges from -3 mm to 0 mm, and for those wider, from -0.4% to 0.1%.


For PP belts up to 750 mm (30") in width, the decrease is between -2 mm and 1 mm, with the reduction for wider belts ranging from -0.4% to 0.1%.

Standard belt widths are incremented by 50 mm (2"). The minimum width is 83.4 mm (3.25").

Accessories for 7520 Series - Configuration


Straight flight

Closed hinge design




Flush grid flight

Closed hinge design



Sidewall




Straight flight modules are available with one smooth side and one side "no-stick" developed to improved handle of wet or sticky food products.

Sidewall modules includes both sides, left and right.

Metric Size

Technical configuration

Dimension expressed in millimeter

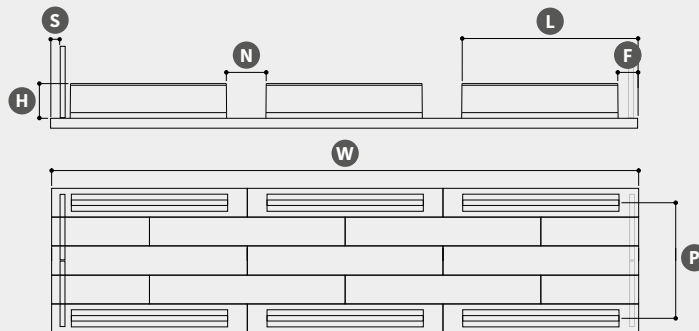

Closed hinge design available.

Belt surface	Flat Top (FT)								Flush Grid (FG)													
Belt Material & color	PE - Polyethylene				POM - Acetal resin				PP - Polypropylene													
	RAL 5005		Cyan		RAL 5005		Cyan		RAL 5005		Cyan											
	White		Natural		White				White													
Pin Material	PBT	PA6	PE	PP	PBT	PA6	PE	PP	PBT	PA6	PE	PP										
W Width	Standard (50 multiple)								Special (16,66 multiple)													
H Accessories height	Straight flight								Flush grid flight		Sidewall											
	25		50		75		100		75		25		50									
P Pitch	Number of pitches or distance between accesories (25,4 mm multiple)																					
F Flight Side Indent S Sidewall Side Indent	Straight or curved flight only								Straight or curved flight + Sidewalls													
	0		37,5		56		75		112		131		37,5		56		75		112		131	
	-		-		-		-		-		-		18		37		56		93		112	
Notch*	No				Single				Double				Triple									
	L Notch width (16,67 mm multiple)								N Notch distance (2 or more)													

For some combinations the nominal tensile strengths of the belt will be reduced to the strength of the accessory. For different combination, please ask to your sales representative.