
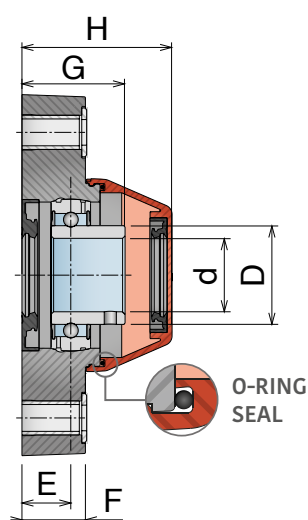


UCFL Grub screw

Watertight bearings - solid version

Main features:

- Housing in reinforced polypropylene
- Chrome steel or stainless steel ball bearing (pre-lubricated)
- Nickel-plated brass mounting hole spacers
- Nickel plated steel or SS grease nipple with self-forming thread M6
- Polypropylene open cap with O-ring seal & NBR top seal
- Stainless steel washers
- NBR bottom seal

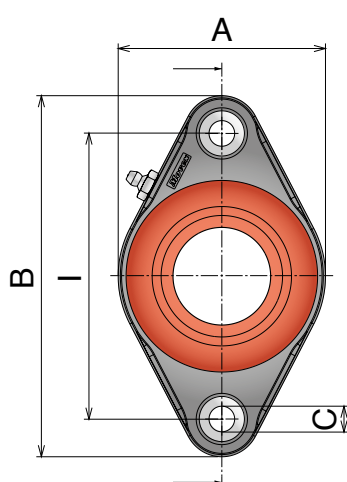

FIXING METHOD



GRUB SCREW



Chrome Steel	Chrome Steel "Long life"	Stainless Steel	SS ProRun											
Article-Number				Series	d	I	A	B	C	D	E	F	G	H
82505	82505L	82505SS	82505LSS	UCFL 204/76,5	20	76,5	56	100	10,2	29	15,5	12	26	49
82510	82510L	82510SS	82510LSS	UCFL 204		90	62	116	11	29	16	20	34	51,5
82501	82501L	82501SS	82501LSS	UCFL 205/90	25	90	71	130	10,2	34	16,8	22,5	36,3	52
82511	82511L	82511SS	82511LSS	UCFL 205		99	71	130	11	34	16,8	22,5	36,3	52
82522	82522L	82522SS	82522LSS	UCFL 206/90	30	90	85	116	10,2	40,3	14,5	20	36,5	55,5
82512	82512L	82512SS	82512LSS	UCFL 206		117	85	148	11	40,3	20	26	42	61,5
82503	82503L	82503SS	82503LSS	UCFL 207/117	35	117	93	148	11	48	19,5	26	43	66,5
82523	82523L	82523SS	82523LSS	UCFL 207/117		117	112	148	11	48	19,5	26	43	66,5
82513	82513L	82513SS	82513LSS	UCFL 207		130	93	162	11	48	19,5	26	43	66,5
82504	82504L	82504SS	82504LSS	UCFL 208/117	40	117	93	148	11	53	19	26	44	66,5
82524	82524L	82524SS	82524LSS	UCFL 208/117		117	112	148	11	53	19	26	44	66,5