

522 HD FT One track Belt

Tappeto Modulare 522 HD, H=8,7
Modular Belt Series 522 HD, H=8,7 / Modulare Mattenkette 522 HD, H=8,7

CODE STRUCTURE GUIDE (Example)

Backflex radius min.: 10 mm

5271	01	9115	A
Series	*Material	Width	Version

12.7mm
PITCH

			SAMPLE BOX
pg. 355-356	308/312/315	pg. 771>781	Art.-Nr. 5271018888A

*Material

Easy Delivery

LFA - Code 01

Low friction Acetal

MX - Code 03

Performance PBT

PFX - Code 30

Extra performance PBT

Max w. load: See table below
Weight: 7,8 kg/m²
Temp. range dry: -40÷80 °C
Temp. range wet: -40÷65 °C
Pin material: PBT white

Max w. load: See table below
Weight: 7,5 kg/m²
Temp. range dry: -40÷120 °C
Temp. range wet: -40÷60 °C
Pin material: POM black

Max w. load: See table below
Weight: 7,5 kg/m²
Temp. range dry: -40÷120 °C
Temp. range wet: -40÷60 °C
Pin material: POM black




Pin Sphere®
AUTOLOCK

- Easier installation
- Quicker maintenance
- High strength

Width 29 mm

Version C - With 2 Positioner

Version A - Standard





Series	Material	Width	Version
5271	*	9115	A
5271	*	9115	C

Width 34 mm

Version C - With 2 Positioner

Version A - Standard





Series	Material	Width	Version
5271	*	9134	A
5271	*	9134	C

Width 37 mm

Version C - With 2 Positioner

Version A - Standard





Series	Material	Width	Version
5271	*	9145	A
5271	*	9145	C

Width 51 mm

Version C - With 2 Positioner

Version A - Standard





Series	Material	Width	Version
5271	*	9200	A
5271	*	9200	C

Width 76 mm

Version C - With 2 Positioner

Version A - Standard

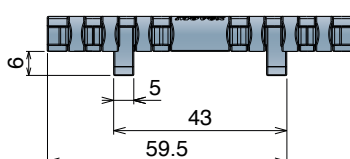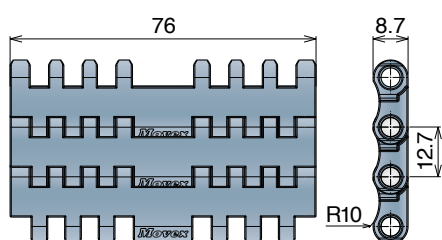

Series	Material	Width	Version
5271	*	9300	A
5271	*	9300	C

Max working load (N)

Width	29	34	37	51	76
LFA	600	870	945	1300	2000
MX	450	680	740	1020	1520
PFX	450	680	740	1020	1520