

NEW 7870 FG

Tappeto Modulare 7870 FG, H=6 M=3"

Modular Belt Series 7870 FG, H=6 M=3" / Modulare Mattenkette 7870 FG, H=6 M=3"

Backflex radius min.: 7.5 mm | Pin diameter: 3 mm



pg. 354

NoseBars

pg. 307

Active
transfer plate

pg. 334>338



pg. 771>781

25.0%
OPEN SURFACE8 mm
PITCH**Pin Sphere®**
AUTOLOCK

- Easier installation
- Quicker maintenance

Width* (inch)

0003

0006

0009

0012

0015

0018

0021

0024

0027

0030

0033

0036

0039

0042


0045

0048

0051

0054

Version A - Standard

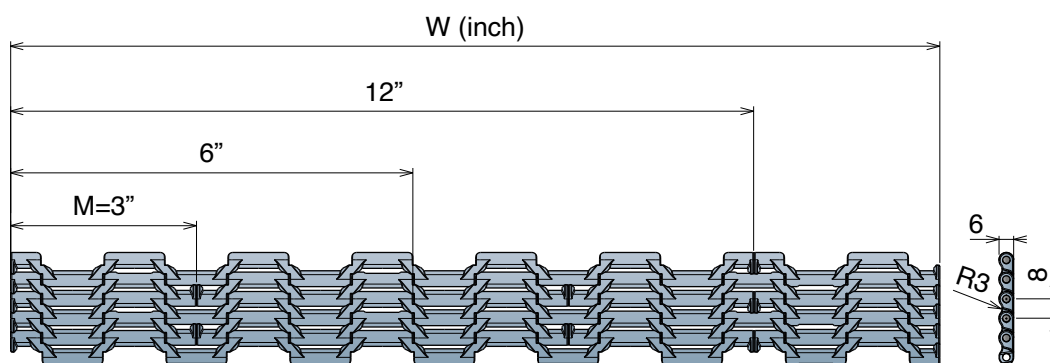

BELT MATERIAL

POM - Acetal resin

BELT COLORS

RAL 5005

Cyan

White

LFA

PINS AVAILABLE

PBT Pin

Max w. load: 2900 N/m

Weight: 5.1 kg/m²

Temp. range: -40+80 °C

**7870 FT
MOVEX TOOL**Developed to facilitate belt
assembly and disassembly.

Article Nr.

29969

Movex tools are made with 3D printer, the color may vary due to availability of the material.

***Belts wider than standard are available with 3 inch increments.**

The nominal tensile strength and the nominal width tolerance are valid for a temperature of 23°C (73 °F).

The actual width of the belt typically falls below the nominal value by 0.1% to 0.3%.

Non-Standard belt widths are incremented by 25.4 mm (1"). The minimum width is 50.8 mm (2.0").