

335

Guide a rulli laterale
Roller guides / Röllchenführung


PATENTED

Max fixing load M8 screw: 15 N·m | Minimum internal/external radius: 305 mm



TYPE A
Roller in
Acetal resin

Part	Article-Nr.	Type
335	33502	A

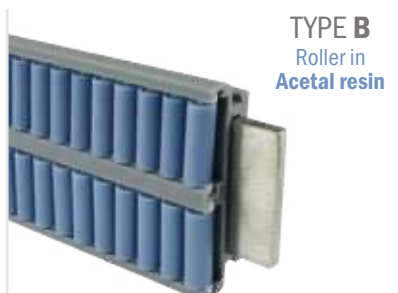

TYPE B
Roller in
Acetal resin


Part	Article-Nr.	Type
335	33504	B





TYPE B1
Soft roller in
SEBS rubber

Part	Article-Nr.	Type
335	33506	B1

Design TYPE A

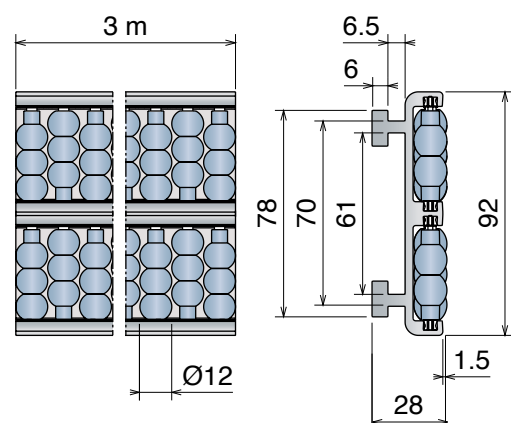

Design TYPE B and B1

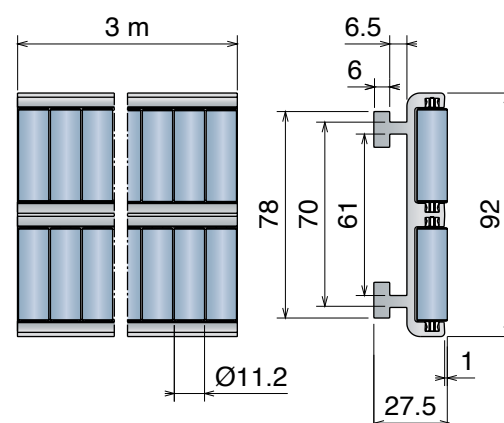


These roller guides
can be curved in either
directions.

Bending machine
and Rollers
Page 484>>486



Fixing screw:
M8 hex.head
or PART 362
Page 538

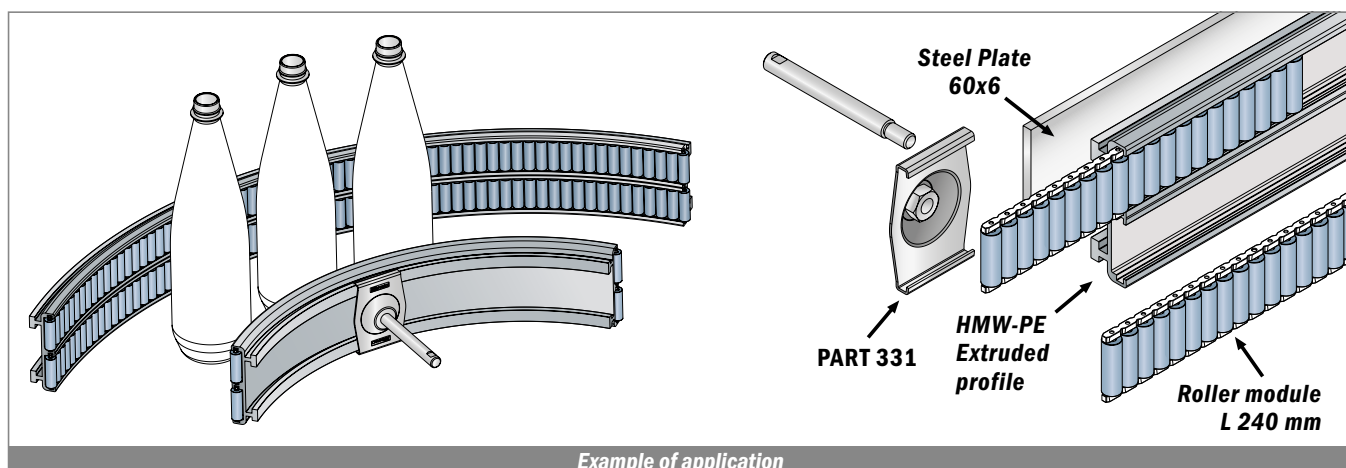

Example of application