


UCT Grub screw

Watertight bearings - solid version

Main features:

- Housing in reinforced polypropylene
- Stainless steel ball bearing (pre-lubricated)
- Stainless steel mounting hole spacers
- Nickel plated steel or SS grease nipple with self-forming thread M6
- Polypropylene open cap with O-ring seal & NBR top seal
- Washer for grease nipple in PE
- NBR bottom seal

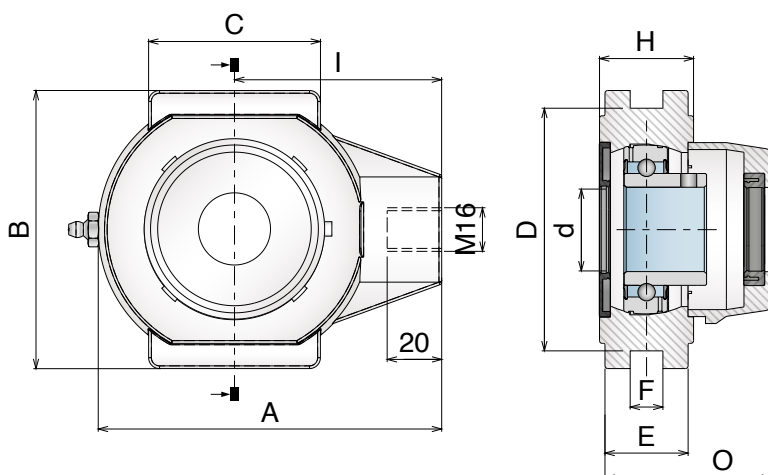

FIXING METHOD



GRUB SCREW

Stainless Steel

Article-Number	Series	d	I	A	B	C	D	E	F	H	O
○ 86030 ● 86030B	UCT 204	20	64	99	88	47	76	23,5	12	27,5	46,5
○ 86031 ● 86031B	UCT 205	25	64	99	88	47	76	23,5	12	27,5	46,5
○ 86032 ● 86032B	UCT 206	30	76	125	102	63	90	30,5	12	34,5	60
○ 86033 ● 86033B	UCT 207	35	76	125	102	63	90	30,5	12	34,5	62
○ 86034 ● 86034B	UCT 208	40	140	114	80	102	33,5	16	38,5	70	76

SS ProRun

Article-Number	Series	d	I	A	B	C	D	E	F	H	O
○ 86030L ● 86030BL	UCT 204	20	64	99	88	47	76	23,5	12	27,5	46,5
○ 86031L ● 86031BL	UCT 205	25	64	99	88	47	76	23,5	12	27,5	46,5
○ 86032L ● 86032BL	UCT 206	30	76	125	102	63	90	30,5	12	34,5	60
○ 86033L ● 86033BL	UCT 207	35	76	125	102	63	90	30,5	12	34,5	62
○ 86034L ● 86034BL	UCT 208	40	140	114	80	102	33,5	16	38,5	70	76