

550 UTS One track Belt

Tappeti modulari / Modular belts / Mattenketten

PATENTED

Belts wider than standard are available with 85 mm increments

NEW 550 UTS One track Belt Open Surface 25% Tappeto Modulare 550 UTS, H=8,7 K330 Modular Belt Series 550 UTS, H=8,7 K330 / Modulare Mattenkette 550 UTS, H=8,7 K330

CODE STRUCTURE GUIDE (Example)

Backflex radius min.: 25 mm

5502	01	9330	A
Series	*Material	Width	Version

	
pg. 362/363	pg. 771>781

*Material

LFA - Code 01

Low friction Acetal

Easy Delivery

Max w. load: 2500 N
Weight: 7,0 kg/m²
Temp. range dry: -40÷80 °C
Temp. range wet: -40÷65 °C
Pin material: PBT white

MX - Code 03

Performance PBT

Max w. load: 2000 N
Weight: 6,7 kg/m²
Temp. range dry: -40÷120 °C
Temp. range wet: -40÷60 °C
Pin material: POM grey

LFB - Code 23

Low friction Acetal

Max w. load: 2500 N
Weight: 7,0 kg/m²
Temp. range dry: -40÷80 °C
Temp. range wet: -40÷65 °C
Pin material: PBT white

PFX - Code 30

Extra performance PBT

Max w. load: 2000 N
Weight: 6,7 kg/m²
Temp. range dry: -40÷120 °C
Temp. range wet: -40÷60 °C
Pin material: POM grey

**THE BEST CHOICE FOR
DRY RUNNING APPLICATIONS**

One modular belt, countless uses.

The benefits of a flat top and flush grid belts, combined. Ideal for...




✓ Simplifying your line layout and inventory management.

✓ Saving resources, energy and maintenance time.




- Easier installation
- Quicker maintenance
- 100% interchangeable

Version A - Standard

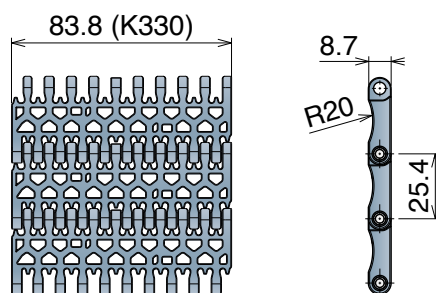

Version C - With 2 Positioner

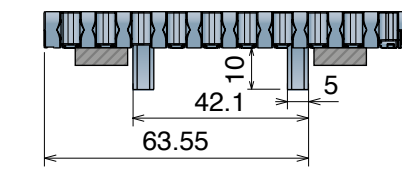

Version A - Standard

Series	Material	Width	Version
5502	*	9330	A

Version C - With 2 Positioners

Series	Material	Width	Version
5502	*	9330	C

550 UTS and One track belt MOVEX TOOL

The specific tool for belts developed to facilitate belt assembly and disassembly.



Article Nr. 29970

Movex

Metric Size

Tappeti modulari / Modular belts / Mattenketten