


Materiale / Material / Materialien:

Guida: alluminio anodizzato/Guide: anodized aluminum/Führung: eloxiertem Aluminium
 Rulli: resina acetica o gomma SEBS/Rollers: Acetal Resin or SEBS rubber/Röllchen: Azetal
 oder SEBS gummi


361

Guide a rulli intermedia
Roller guides / Röllchenführung



Delivery: **Easy** **Standard** Max fixing load M8 screw: 15 N·m | Minimum internal/external radius: 610 mm

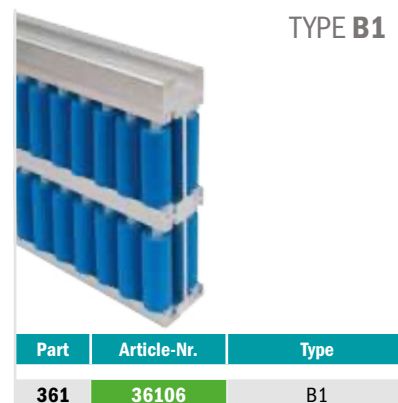

Design TYPE A

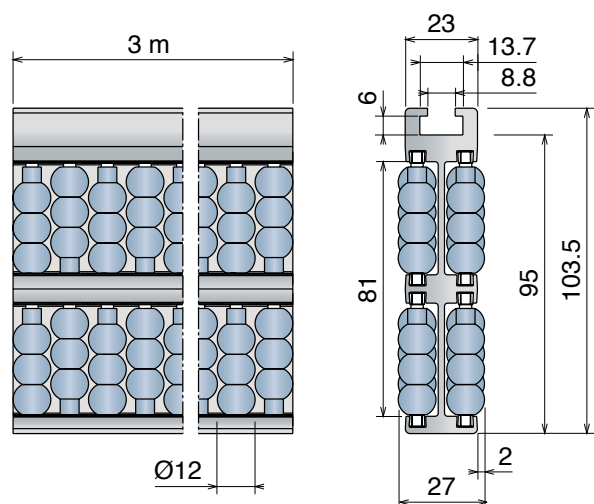

Design TYPE B and B1

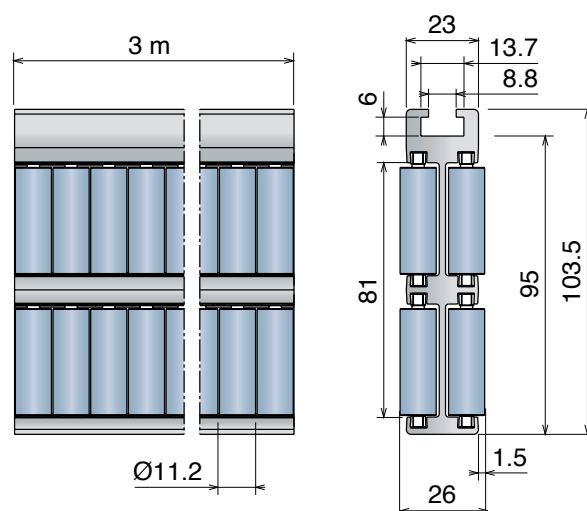

These roller guides
can be curved in either
directions.

**Bending machine
and Rollers**

Page 484>>486



Fixing screw:
M8 hex.head
or **PART 362**
Page 538


Puntale / Shoe / Einlaufschuh


Part	Article-Nr.	Type
367	36701	fresato/machined/gefräst

Discover more options:
Page 554/555