


UCP Grub screw

Watertight bearings - solid version

Main features:

- Housing in reinforced polypropylene
- Stainless steel ball bearing (pre-lubricated)
- Stainless steel mounting hole spacers
- Nickel plated steel or SS grease nipple with self-forming thread M6
- Polypropylene open cap with O-ring seal & NBR top seal
- Washer for grease nipple in PE
- NBR bottom seal

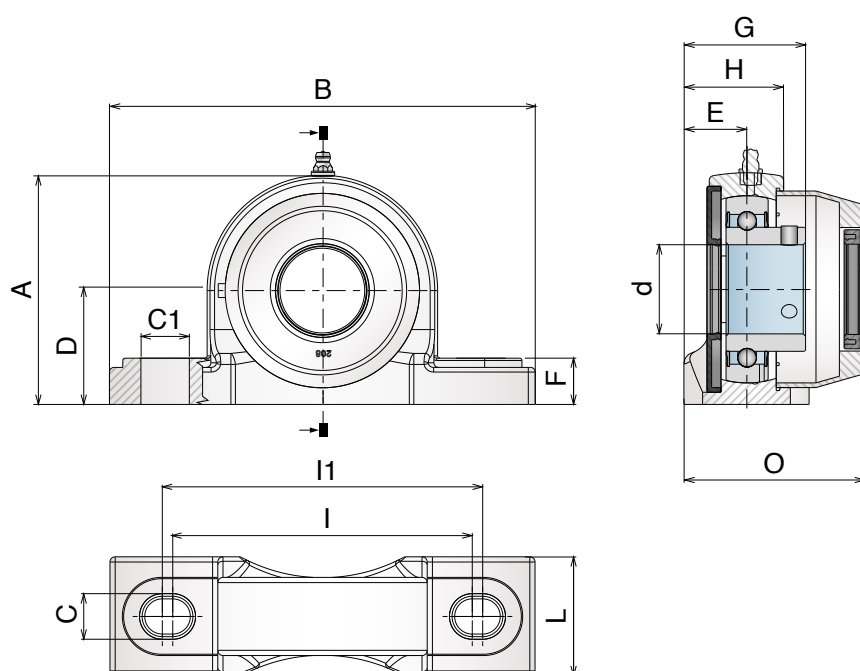

FIXING METHOD



GRUB SCREW

Stainless Steel

Article-Number	Series	d	I	I1	A	B	C	C1	D	E	F	G	H	L	O
○ 81830 ● 81830B	UCP 204	20	92	98	65,5	127	11	14	34	18,8	15	37	30	37	50
○ 81831 ● 81831B	UCP 205	25	102	108	71,1	140,5	11	14	36,7	19	15	38	33	37,8	54,1
○ 81832 ● 81832B	UCP 206	30	115	123	83,5	163,6	14	18	43,3	23	17,8	46	38	46	65
○ 81833 ● 81833B	UCP 207	35	123	131	94,2	168	14	18	48	24	18	48	39	48	67
○ 81834 ● 81834B	UCP 208	40	133	141	98,8	184	14	18	50	26,9	20	51,8	43	53,6	77,5

SS ProRun

Article-Number	Series	d	I	I1	A	B	C	C1	D	E	F	G	H	L	O
○ 81830L ● 81830BL	UCP 204	20	92	98	65,5	127	11	14	34	18,8	15	37	30	37	50
○ 81831L ● 81831BL	UCP 205	25	102	108	71,1	140,5	11	14	36,7	19	15	38	33	37,8	54,1
○ 81832L ● 81832BL	UCP 206	30	115	123	83,5	163,6	14	18	43,3	23	17,8	46	38	46	65
○ 81833L ● 81833BL	UCP 207	35	123	131	94,2	168	14	18	48	24	18	48	39	48	67
○ 81834L ● 81830BL	UCP 208	40	133	141	98,8	184	14	18	50	26,9	20	51,8	43	53,6	77,5