

550 FT One track Belt

Tappeto Modulare 550 FT, H=8,7 K330
Modular Belt Series 550 FT, H=8,7 K330 / Modulare Mattenkette 550 FT, H=8,7 K330

CODE STRUCTURE GUIDE (Example)

Backflex radius min.: 25 mm

5221	01	9330	A
Series	*Material	Width	Version



*Material

LFA - Code 01

Low friction Acetal

Easy Delivery

Max w. load: 2500 N
Weight: 8,5 kg/m²
Temp. range dry: -40÷80 °C
Temp. range wet: -40÷65 °C
Pin material: PBT white

PP - Code 02

Polypropylene

Max w. load: 1500 N
Weight: 8,4 kg/m²
Temp. range dry: 4÷104 °C
Temp. range wet: 4÷104 °C
Pin material: PP blue

MX - Code 03

Performance PBT

Max w. load: 2000 N
Weight: 8,2 kg/m²
Temp. range dry: -40÷120 °C
Temp. range wet: -40÷60 °C
Pin material: POM grey

DKM - Code 16

Aramid Reinforced Acetal

Max w. load: 2500 N
Weight: 8,5 kg/m²
Temp. range dry: -40÷80 °C
Temp. range wet: -40÷65 °C
Pin material: PBT white

MWX - Code 17

Polyamide Composite

Max w. load: 2500 N
Weight: 8,9 kg/m²
Temp. range dry: -40÷104 °C
Temp. range wet: NR
Pin material: PBT white

LFB - Code 23

Low friction Acetal

Max w. load: 2500 N
Weight: 8,5 kg/m²
Temp. range dry: -40÷80 °C
Temp. range wet: -40÷65 °C
Pin material: PBT white

PFX - Code 30

Extra performance PBT

Max w. load: 2000 N
Weight: 8,2 kg/m²
Temp. range dry: -40÷120 °C
Temp. range wet: -40÷60 °C
Pin material: POM grey


THE BEST CHOICE FOR
DRY RUNNING APPLICATIONS




Pin Sphere®
AUTO LOCK

- Easier installation
- Quicker maintenance
- 10% Higher strength


K330 Version A - Standard

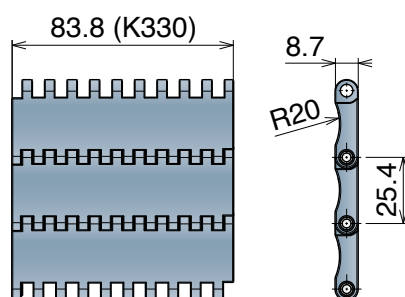


Version C - With 2 Positioner

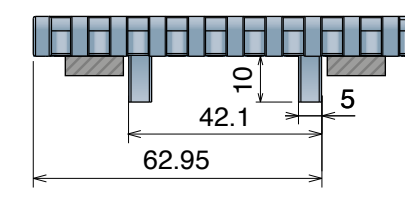

K450 Version A - Standard

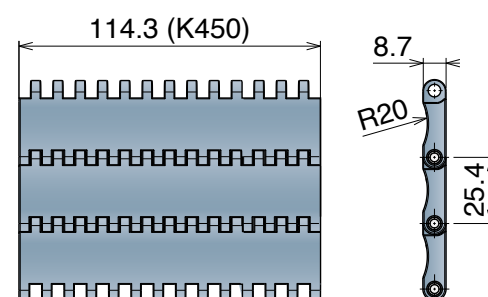

Version C - With 2 Positioner

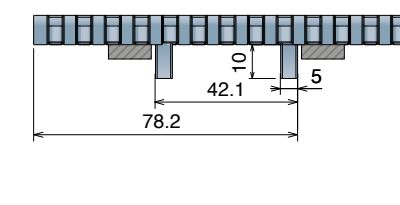

Series	Material	Width	Version
5221	*	9330	A
5221	*	9330	C

Series	Material	Width	Version
5221	*	9450	A
5221	*	9450	C

Disassembling / Assembling mode



550 FT one track belt MOVEX TOOL

The specific tool for belts developed to facilitate
belt assembly and disassembly.



Article Nr. 29970

Movex tools are made with 3D printer, the color may vary due to availability of the material.