


UCFL Grub screw


Watertight bearings - reinforced version

Main features:

- Housing in reinforced polyamide
- Chrome steel or stainless steel ball bearing (pre-lubricated)
- Nickel-plated brass mounting hole spacers
- Nickel plated steel or SS grease nipple with self-forming thread M6
- Polypropylene open cap with O-ring seal & NBR top seal
- Stainless steel washers
- NBR bottom seal

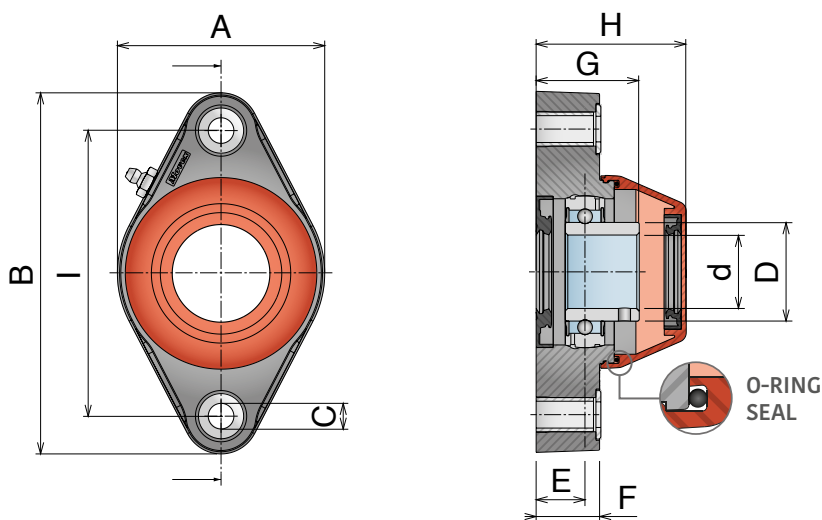

FIXING METHOD



GRUB SCREW

Chrome Steel	Chrome Steel "Long life"	Stainless Steel											
Article-Number			Series	d	I	A	B	C	D	E	F	G	H
80410	80410L	80410SS	UCFL 204	20	90	62	116	11	29	16	20	34	51,5
80400	80400L	80400SS	UCFL 204		90	71	130	11	29	17,5	22,5	33,5	52
80421	80421L	80421SS	UCFL 205/90	25	90	85	116	11	34	14,5	20	34	55,5
80401	80401L	80401SS	UCFL 205/90		90	71	130	11	34	16,8	22,5	36,3	52
80411	80411L	80411SS	UCFL 205		99	71	130	11	34	16,8	22,5	36,3	52
80422	80422L	80422SS	UCFL 206/90	30	90	85	116	11	40,3	14,5	20	36,5	55,5
80432	80432L	80432SS	UCFL 206/99		99	85	130	11	40,3	20	26	42	61,5
80402	80402L	80402SS	UCFL 206/99		99	85	148	11	40,3	20	26	42	61,5
80412	80412L	80412SS	UCFL 206		117	85	148	11	40,3	20	26	42	61,5
80403	80403L	80403SS	UCFL 207/117	35	117	93	148	11	48	19,5	26	43	66,5
80423	80423L	80423SS	UCFL 207/117		117	112	148	11	48	19,5	26	43	66,5
80413	80413L	80413SS	UCFL 207		130	93	162	11	48	19,5	26	43	66,5
80404	80404L	80404SS	UCFL 208/117	40	117	93	148	11	53	19	26	44	66,5
80424	80424L	80424SS	UCFL 208/117		117	112	148	11	53	19	26	44	66,5
80414	80414L	80414SS	UCFL 208		130	93	162	11	53	19	26	44	66,5