

521 FT One track Belt

Tappeto Modulare 521 FT, H=8,7
Modular Belt Series 521 FT, H=8,7 / Modulare Mattenkette 521 FT, H=8,7

CODE STRUCTURE GUIDE (Example)

Backflex radius min.: 10 mm

5311	01	9750	A
Series	*Material	Width	Version

		
pg. 355-356	308/311/314	pg. 771>781

*Material

LFA - Code 01

Low friction Acetal

Weight: 8,0 kg/m²
Temp. range dry: -40÷80 °C
Temp. range wet: -40÷65 °C
Pin material: PBT white

MX - Code 03

Performance PBT

Weight: 7,8 kg/m²
Temp. range dry: -40÷120 °C
Temp. range wet: -40÷60 °C
Pin material: POM grey

DKM - Code 16

Aramid Reinforced Acetal

Weight: 8,0 kg/m²
Temp. range dry: -40÷80 °C
Temp. range wet: -40÷65 °C
Pin material: PBT white

MWX - Code 17

Polyamide Composite

Weight: 8,3 kg/m²
Temp. range dry: -40÷104 °C
Temp. range wet: NR
Pin material: PBT white

MPX - Code 25

Lubricated Acetal

Weight: 8,0 kg/m²
Temp. range dry: -40÷80 °C
Temp. range wet: -40÷65 °C
Pin material: PBT white

PFX - Code 30

Extra performance PBT


Weight: 7,8 kg/m²
Temp. range dry: -40÷120 °C
Temp. range wet: -40÷60 °C
Pin material: POM grey

Max working load (N)


Width	K450	K750
LFA	2400	4000
MX	2000	3300
DKM	2400	4000
MWX	2400	4000
MPX	2400	4000
PFX	2000	3300

K450

Version A - Standard

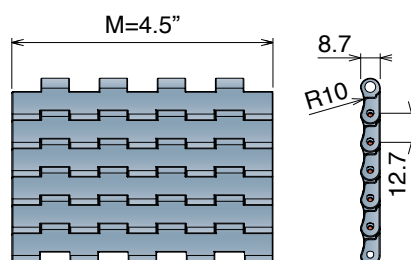


Version C - With 2 Positioner




Series	Material	Width	Version
5311	*	9450	A
5311	*	9450	C

K750

Version A - Standard

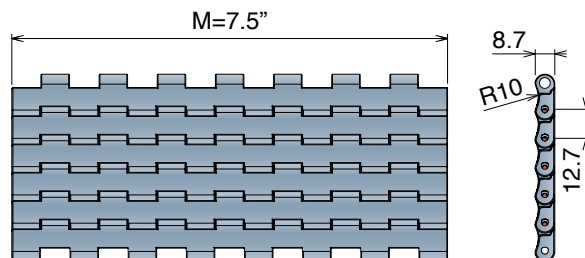

Version C - With 2 Positioner

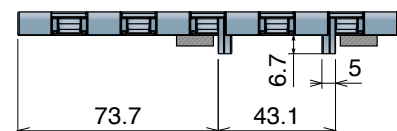

Series	Material	Width	Version
5311	*	9750	A
5311	*	9750	C