

520 FTT

Tappeto Modulare 520 FTT, H=8,7 M=85

Modular Belt Series 520 FTT, H=8,7 M=85 / Modulare Mattenkette 520 FTT, H=8,7 M=85

CODE STRUCTURE GUIDE (Example)



Backflex radius min.: 10 mm

5206	01	0085	C
Series	*Material	Width	Version


pg. 357-358	307/311/314	pg. 771>781

*Material

LFA - Code 01	MX - Code 03
Low friction Acetal	Performance PBT
Max w. load: 21500 N/m	Max w. load: 17500 N/m
Weight: 7,8 kg/m ²	Weight: 7,5 kg/m ²
Temp. range dry: -40÷80 °C	Temp. range dry: -40÷120 °C
Temp. range wet: -40÷65 °C	Temp. range wet: -40÷60 °C
Pin material: PBT white	Pin material: POM grey

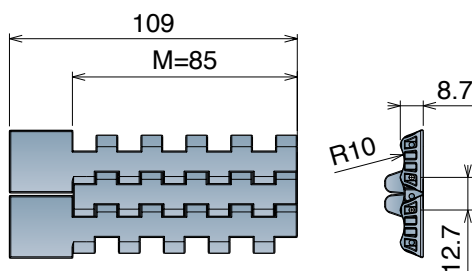

Version C




Version C


Series	Material	Width	Version
5206	*	0085	C

Max working load (N)

Width	85
LFA	1850
MX	1500

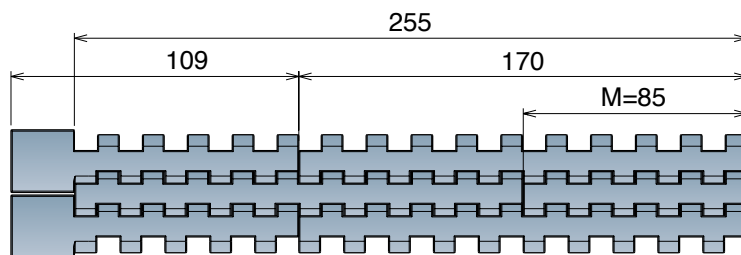

Version CN - Near

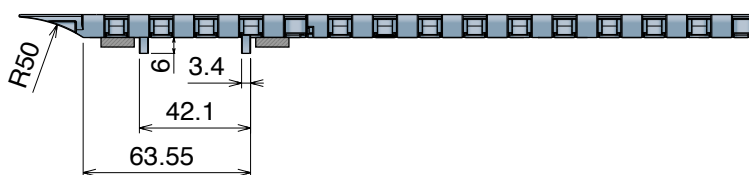

Version C0 - Opposite



Version CN - Near

Series	Material	Width	Version
5206	*	0170	CN
5206	*	0255	CN

Version C0 - Opposite

Series	Material	Width	Version
5206	*	0170	C0
5206	*	0255	C0