


UCFA *Grub screw*

Watertight bearings - solid version

Main features:

- Housing in reinforced polyamide
- Chrome steel or stainless steel ball bearing (pre-lubricated)
- Nickel-plated brass mounting hole spacers
- Nickel plated steel or SS grease nipple with self-forming thread M6
- Polypropylene open cap with O-ring seal & NBR top seal
- Stainless steel washers
- NBR bottom seal

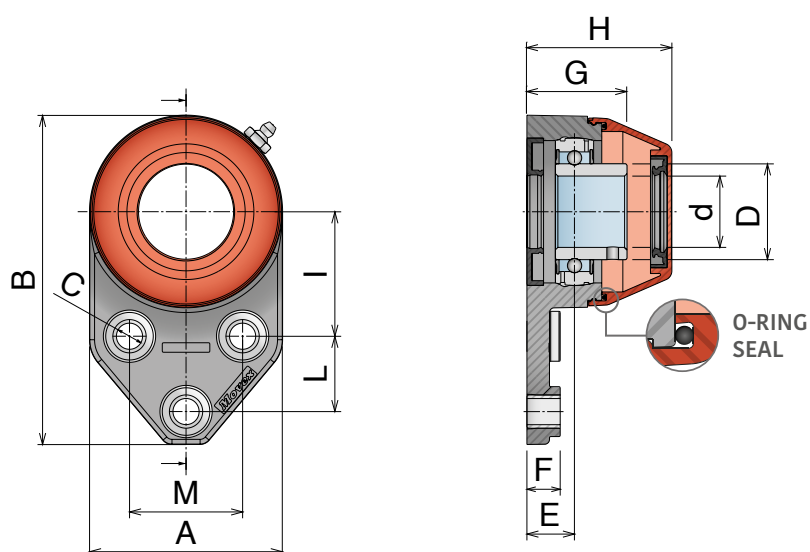

FIXING METHOD



GRUB SCREW

Chrome Steel	Chrome Steel "Long life"	Stainless Steel	SS ProRun
--------------	--------------------------	-----------------	-----------

Article-Number				Series	d	I	A	B	C	D	E	F	G	H	L	M
83700	83700L	83700SS	83700LSS	UCFA 204	20	46	68,8	124,2	11	29	16,4	14	34,4	51,8	28,6	41,3
83701	83701L	83701SS	83701LSS	UCFA 205	25	46	68,8	124,2	11	34	17,8	14	37,3	51,8	28,6	41,3
83702	83702L	83702SS	83702LSS	UCFA 206	30	52,4	81,3	138,6	11	40,3	20	14	42	61	31,7	47,6