


# S400B Series

Piedi di livellamento / Leveling feet / Nivellierfüße

On request vulcanized rubber can be provided  
white or blue and spindle can be made in AISI 316.

## Materiale / Material / Materialien:

Base, stelo, rondella e boccia: Acciaio inox  
Base plate, spindle, washer and cover: Stainless steel  
Fussplatte, Spindel, Scheibe und Hülse: Edelstahl

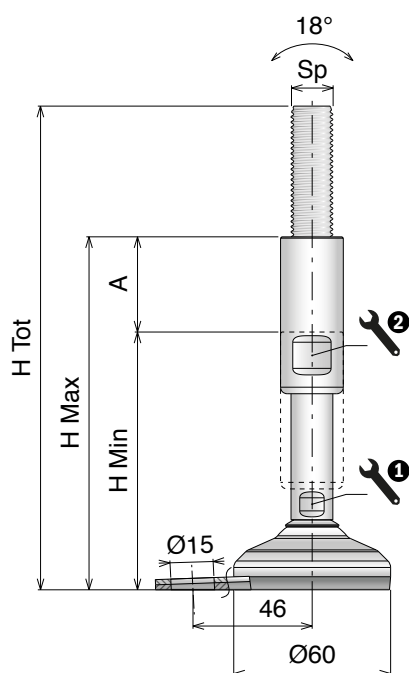

## Ø60

DIAMETER (mm)




ANTI-SLIP



FIXING POINT

| Art-Nr. | Sp  | H Tot (mm) | H Min (mm) | H Max (mm) | A (mm) | 1 (mm) | 2 (mm) | Load (N) |
|---------|-----|------------|------------|------------|--------|--------|--------|----------|
| 902249  | M12 | 185        | 105        | 150        | 45     | 10     | 17     | 4.500    |
| 902250  |     | 235        | 135        | 200        | 65     | 10     | 17     |          |
| 902251  | M16 | 185        | 105        | 150        | 45     | 13     | 19     | 4.500    |
| 902252  |     | 235        | 135        | 200        | 65     | 13     | 19     |          |
| 902253  | M20 | 185        | 105        | 150        | 45     | 17     | 24     | 4.500    |
| 902254  |     | 235        | 135        | 200        | 65     | 17     | 24     |          |
| 902255  | M24 | 185        | 105        | 150        | 45     | 19     | 30     | 4.500    |
| 902256  |     | 235        | 135        | 200        | 65     | 19     | 30     |          |
| 902257  | M30 | 185        | 105        | 150        | 45     | 24     | 36     | 4.500    |
| 902258  |     | 235        | 135        | 200        | 65     | 24     | 36     |          |
| 902259  |     | 295        | 195        | 260        | 65     | 24     | 36     |          |
| 902260  | M36 | 185        | 105        | 150        | 45     | 30     | 42     | 4.500    |
| 902261  |     | 235        | 135        | 200        | 65     | 30     | 42     |          |
| 902262  |     | 295        | 195        | 260        | 65     | 30     | 42     |          |

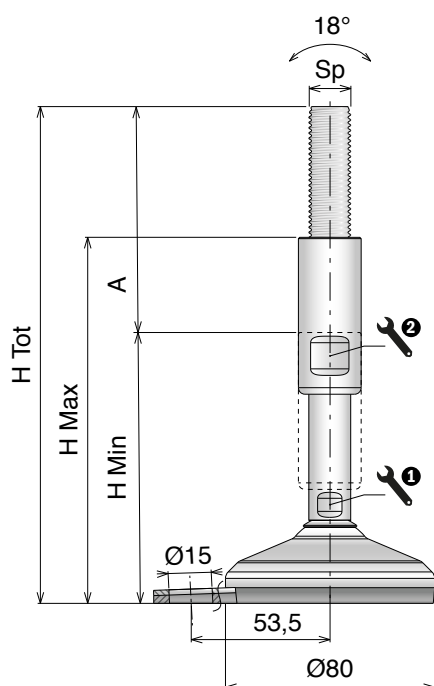

## Ø80

DIAMETER (mm)



ANTI-SLIP



FIXING POINT

| Art-Nr. | Sp  | H Tot (mm) | H Min (mm) | H Max (mm) | A (mm) | 1 (mm) | 2 (mm) | Load (N) |
|---------|-----|------------|------------|------------|--------|--------|--------|----------|
| 902277  | M12 | 190        | 110        | 155        | 45     | 10     | 17     | 12.000   |
| 902278  |     | 240        | 140        | 205        | 65     | 10     | 17     |          |
| 902279  | M16 | 190        | 110        | 155        | 45     | 13     | 19     | 15.000   |
| 902280  |     | 240        | 140        | 205        | 65     | 13     | 19     |          |
| 902281  | M20 | 190        | 110        | 155        | 45     | 17     | 24     | 15.000   |
| 902282  |     | 240        | 140        | 205        | 65     | 17     | 24     |          |
| 902283  | M24 | 190        | 110        | 155        | 45     | 19     | 30     | 15.000   |
| 902284  |     | 240        | 140        | 205        | 65     | 19     | 30     |          |
| 902285  | M30 | 190        | 110        | 155        | 45     | 24     | 36     | 15.000   |
| 902286  |     | 240        | 140        | 205        | 65     | 24     | 36     |          |
| 902287  |     | 300        | 200        | 265        | 65     | 24     | 36     |          |
| 902288  | M36 | 190        | 110        | 155        | 45     | 30     | 42     | 15.000   |
| 902289  |     | 240        | 140        | 205        | 65     | 30     | 42     |          |
| 902290  |     | 300        | 200        | 265        | 65     | 30     | 42     |          |