

Materiale / Material / Materialien:

Basi: Poliammide/Base: Polyamide/Halter: Polyamid

Viti e rondelle: Acciaio inox/Screws and washers: Stainless steel/Schrauben und Scheibe: Edelstahl
Inserti e dadi: ottone nichelato/Inserts nuts: nickel plated brass/Mutter: Messing vernickelt

403-404


Componenti di supporto / Conveyor support components / Stützelemente

403


Base a due braccia 120° con giunto

Bipod 120° with connector / Zweibeinhalter 120° m. Verbinder

Delivery: **Easy** **Standard** Fasteners included | Max recommended tightening torque: 25 N mt

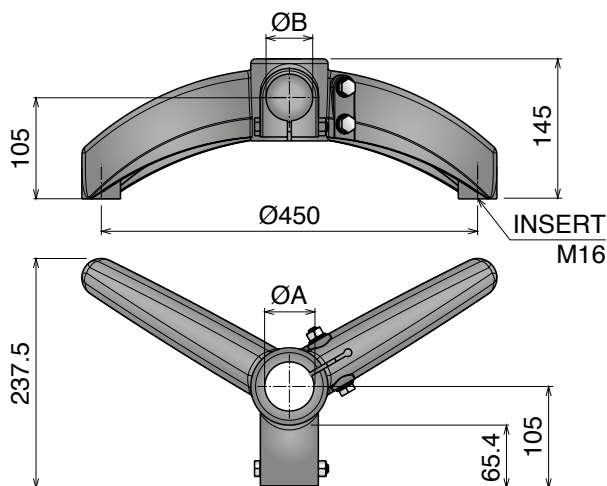

Part	Article-Nr.	ØA	ØB
403	40301	48,3	48,3
403	40305	50,9	48,3
403	40302	60,3	48,3
403	40303	48,3	42,4
403	40306	50,9	42,4
403	40304	60,3	42,4



Tube sliding load resistance


P= 8000 N

Max applicable load

P= 8000 N

Bolts tightening torque

25 N.m

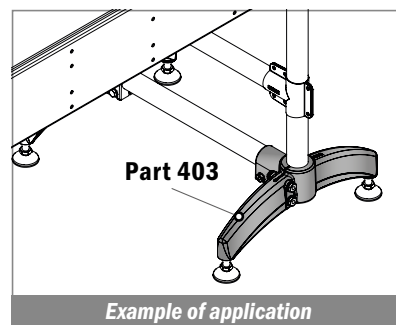


404


Base a tre braccia

Tripod / Dreibeinhalter

Delivery: **Easy** **Standard** Fasteners included | Max recommended tightening torque: 25 N mt

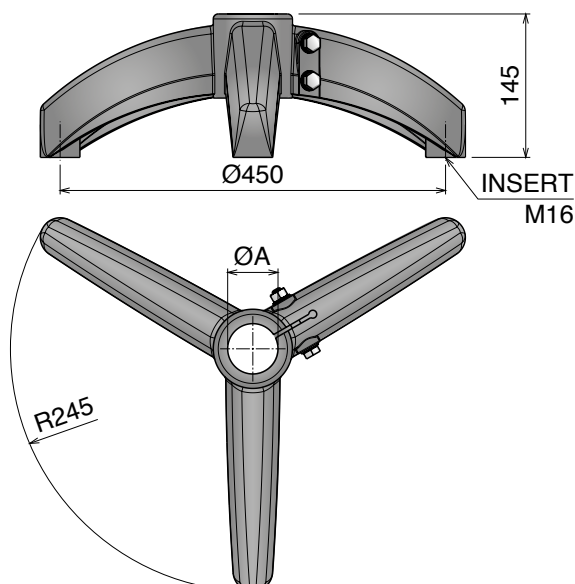

Part	Article-Nr.	ØA
404	40401	48,3
404	40405	50,9
404	40402	60,3



Tube sliding load resistance

P= 8000 N

Max applicable load

P= 10000 N

Bolts tightening torque

25 N.m

