



UCF-H

Locking collar


Watertight bearings - solid version

Main features:

- Housing in reinforced polypropylene & cover in SS
- Chrome steel ball bearing (pre-lubricated)
- Nickel-plated brass mounting hole spacers
- Nickel plated steel or SS grease nipple with self-forming thread M6
- Polypropylene open cap with O-ring seal & NBR top seal
- NBR bottom seal

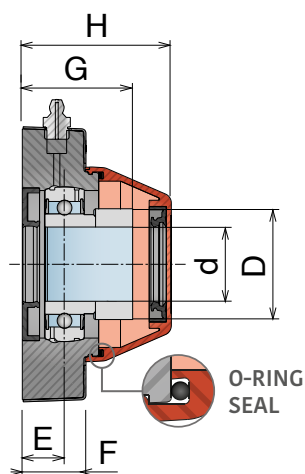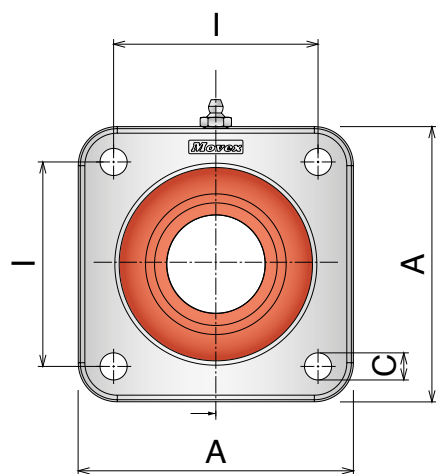

FIXING METHOD
(ECCENTRIC RING)



LOCKING COLLAR

Chrome Steel										
Article-Number	Series	d	I	A	C	D	E	F	G	H
83302H	UCF-H 206	30	83	111,7	11	40,3	17	25	39	60,5
83304H	UCF-H 208/83	40	83	111,7	11	53	19,5	25	44,5	65,5