

NEW 7870 CT

Tappeto Modulare 7870 CT, H=6 M=3"
Modular Belt Series 7870 CT, H=6 M=3" / Modulare Mattenkette 7870 CT, H=6 M=3"



pg. 354

NoseBars


pg. 307

Active
transfer plate

pg. 334>338



pg. 771>781



pg. 651>661



Pin Sphere®
AUTO LOCK

- Easier installation
- Quicker maintenance

Backflex radius min.: 7.5 mm | Pin diameter: 3 mm

8 mm
PITCH

Imperial Size

Width* (inch)

0003

0006

0009

0012

0015

0018

0021

0024

0027

0030

0033

0036

0039

0042


0045

0048

0051

0054

Version A - Standard

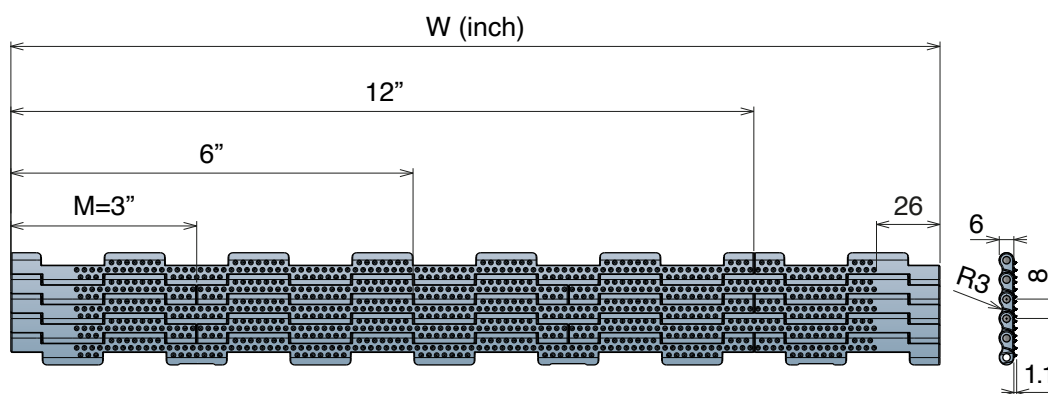

BELT MATERIAL

POM - Acetal resin

BELT COLORS

RAL 5005

Cyan

White

LFA

PINS AVAILABLE

PBT Pin

Max w. load: 3000 N/m

Weight: 5.9 kg/m²

Temp. range: -40+80 °C

7870 FT
MOVEX TOOL

Developed to facilitate belt
assembly and disassembly.



Article Nr. 29969

Movex tools are made with 3D printer, the color may vary due to availability of the material.

*Belts wider than standard are available with 3 inch increments.

The nominal tensile strength and the nominal width tolerance are valid for a temperature of 23°C (73 °F).

The actual width of the belt typically falls below the nominal value by 0.1% to 0.3%.

Non-Standard belt widths are incremented by 25.4 mm (1"). The minimum width is 50.8 mm (2.0").