

550 PRO FT

Tappeto Modulare 550 PRO FT, H=8,7 K330

Modular Belt Series 550 PRO FT, H=8,7 K330 / Modulare Mattenkette 550 PRO FT, H=8,7 K330

CODE STRUCTURE GUIDE (Example)

Backflex radius min.: 25 mm

5227	01	9330	A
Series	*Material	Width	Version

	
pg. 364/365	pg. 771>781

550 PRO FT & PRO M


SAMPLE BOX

Art.-Nr. 5227018888A



Pin Sphere®
AUTO LOCK

- Easier installation
- Quicker maintenance
- 100% interchangeable

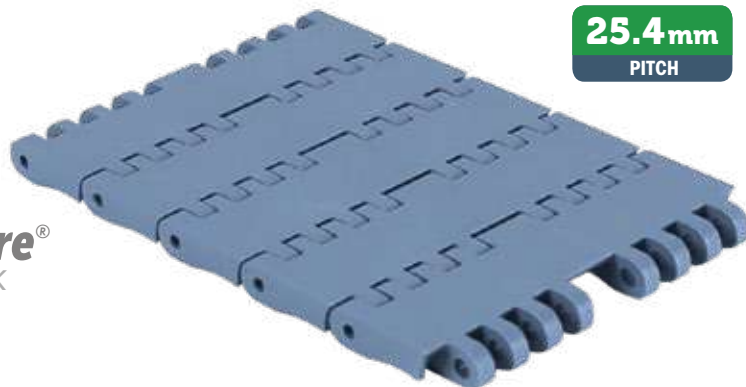

25.4mm
PITCH

*Material

LFA - Code 01

Low friction Acetal

Easy Delivery

Max w. load: 2300 N
Weight: 8,5 kg/m²
Temp. range dry: -40+80 °C
Temp. range wet: -40+65 °C
Pin material: PBT white

MX - Code 03

Performance PBT

Max w. load: 1850 N
Weight: 8,2 kg/m²
Temp. range dry: -40+120 °C
Temp. range wet: -40+60 °C
Pin material: POM grey


PFX - Code 30

Extra performance PBT


Max w. load: 1850 N
Weight: 8,2 kg/m²
Temp. range dry: -40+120 °C
Temp. range wet: -40+60 °C
Pin material: POM grey

**THE BEST CHOICE FOR
DRY RUNNING APPLICATIONS**

Version A - Standard

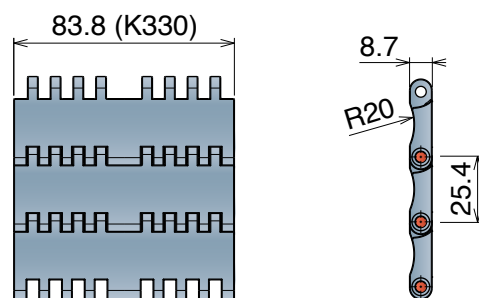

Version C - With 2 Positioner

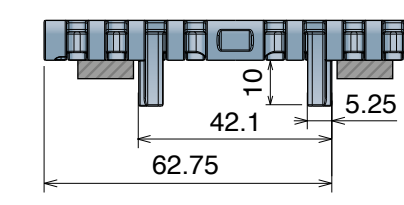

Advantages:

- Optimized product support
- Superior flatness
- Low wear
- Bi-directional

Version A - Standard

Series	Material	Width	Version
5227	*	9330	A

Version C - With 2 Positioners

Series	Material	Width	Version
5227	*	9330	C

550 PRO M & 550 PRO FT

The perfect combination

- Same height between guide and center sprockets (S Dimension)
- Same speed for curved and straight
- Unique sprocket for curved and straight

Layout with 550 Pro M and 550 PRO FT

