

NEW

550 V


Tappeto Modulare 550 GT, H=8,7 M=85

Modular Belt Series 550 GT, H=8,7 M=85 / Modulare Mattenkette 550 GT, H=8,7 M=85

CODE STRUCTURE GUIDE (Example)

Backflex radius min.: 25 mm

5508	01	0085	A
Series	*Material	Width	Version



- Easier installation
- Quicker maintenance
- 100% interchangeable

25.4mm
PITCH

Metric Size

*Material

LFA - Code 01

Low friction Acetal

Max w. load: 25500 N/m
 Weight: 9,0 kg/m²
 Temp. range dry: -40÷80 °C
 Temp. range wet: -40÷65 °C
 Pin material: PBT white

MX - Code 03

Performance PBT

Max w. load: 20500 N/m
 Weight: 8,7 kg/m²
 Temp. range dry: -40÷120 °C
 Temp. range wet: -40÷60 °C
 Pin material: POM grey

AS - Code 12


Antistatic Acetal

Max w. load: 2500 N/m
 Weight: 8,5 kg/m²
 Temp. range dry: -40÷120 °C
 Temp. range wet: -40÷60 °C
 Pin material: PBT white

AS MATERIAL


IS AVAILABLE ONLY FOR
ONE TRACK BELT VERSION

Version A - Standard

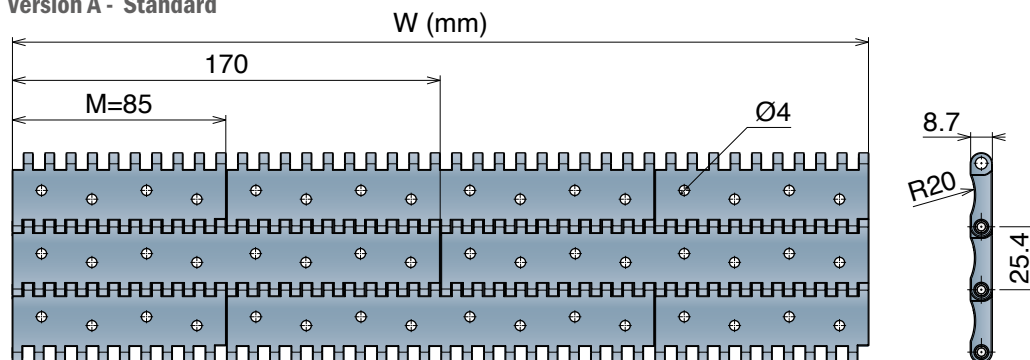

One track Belt version

K85 Version A - Standard




Article-Nr

5508129085A

Version A - Standard

Series	Material	Width	Version
5508	*	0085	A
5508	*	0170	A
5508	*	0255	A
5508	*	0340	A
5508	*	0425	A
5508	*	0510	A
5508	*	0595	A
5508	*	0680	A
5508	*	0765	A
5508	*	0850	A
5508	*	0935	A
5508	*	1020	A
5508	*	1105	A
5508	*	1190	A
5508	*	1275	A
5508	*	1360	A
5508	*	1445	A
5508	*	1530	A

K450 Version A - Standard

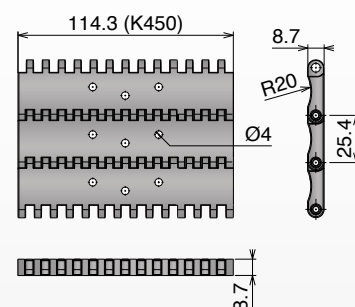

Article-Nr

5508129115A