

600 Heavy duty/Small radius

Tappeti modulari / Modular belts / Mattenketten

Belts wider than standard are available with 85 mm increments

600 Heavy duty/Small radius

Tappeto Modulare Curvilineo Serie 600, H=12,7 M=170
Side Flex Modular Belt Series 600, H=12,7 M=170 / Kurvengängige Mattenkette Serie 600, H=12,7 M=170

CODE STRUCTURE GUIDE (Example)

Backflex radius min.: 25 mm

5424	01	0425	E
Series	*Material	Width	Version

27.5%
OPEN SURFACE

31.75 mm
PITCH

pg. 373-374	pg. 180	pg. 771>781



*Material

LFA - Code 01

Low friction Acetal

Max w. load:

Straight 30000 N/m
Curve 3500 N

Weight: 7,5 kg/m²

Temp. range dry: -40+80 °C

Temp. range wet: -40+65 °C

Pin material: PBT white

LFB - Code 23

Low friction Acetal

Max w. load:



Straight 30000 N/m
Curve 3500 N

Weight: 7,5 kg/m²


Temp. range dry: -40+80 °C

Temp. range wet: -40+65 °C

Pin material: PBT white

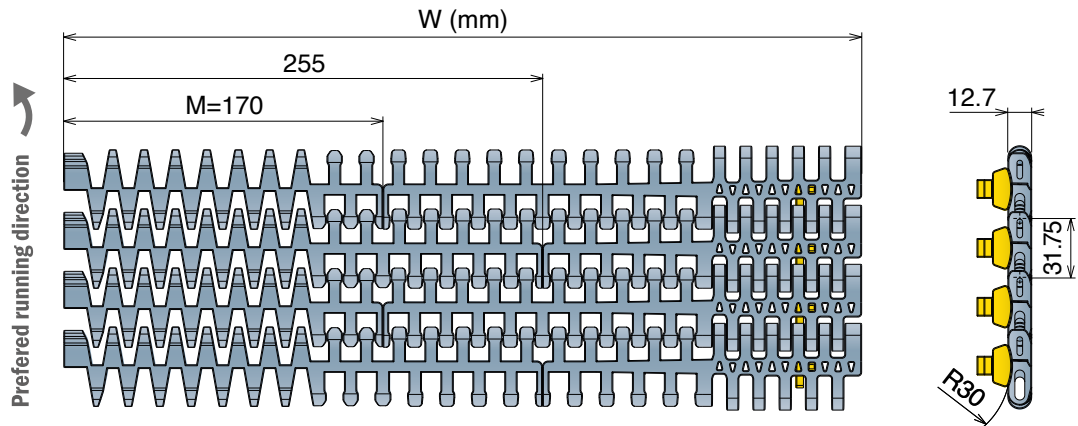

STANDARD



Series	Material	Width	Version	min radius
5424	*	0255	E	390
5424	*	0340	E	420
5424	*	0425	E	500
5424	*	0510	E	600
5424	*	0595	E	720
5424	*	0680	E	880
5424	*	0765	E	1040
5424	*	0850	E	1200

TAB DKM Material



Metric Size

Tappeti modulari / Modular belts / Mattenketten