

530 PRO LBP

Tappeto Modulare 530 PRO LBP, H=8,7 M=3"

Modular Belt Series 530 PRO LBP, H=8,7 M=3" / Modulare Mattenkette 530 PRO LBP, H=8,7 M=3"

CODE STRUCTURE GUIDE (Example)

Backflex radius min.: 25 mm

5237	01	0006	A
Series	*Material	Width	Version




SAMPLE BOX

Art.-Nr. **5237018888A**



Pin Sphere®
AUTOLOCK

- Easier installation
- Quicker maintenance
- High strength

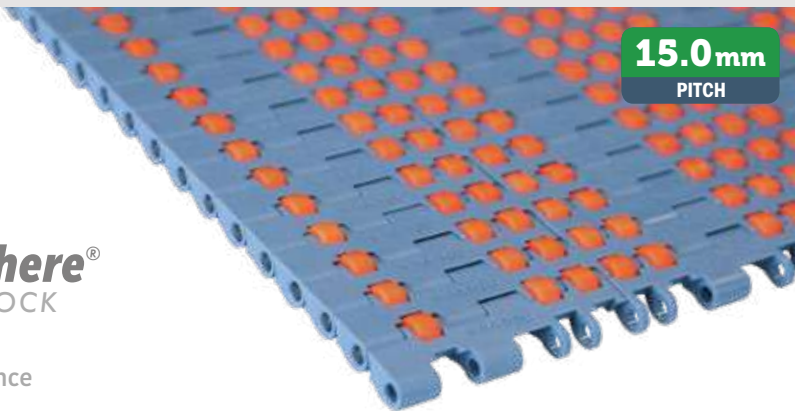

15.0mm
PITCH

Material

LFA - Code 01

Low friction Acetal


Max w. load: 21000 N/m
Weight: 10,0 kg/m²
Temp. range dry: -40÷80 °C
Temp. range wet: -40÷65 °C
Pin material: PBT white

PFX Roller


Density: 3.400 rollers/m²

**THE BEST CHOICE TO REACH
THE LOWEST FRICTION**

Version A - Standard

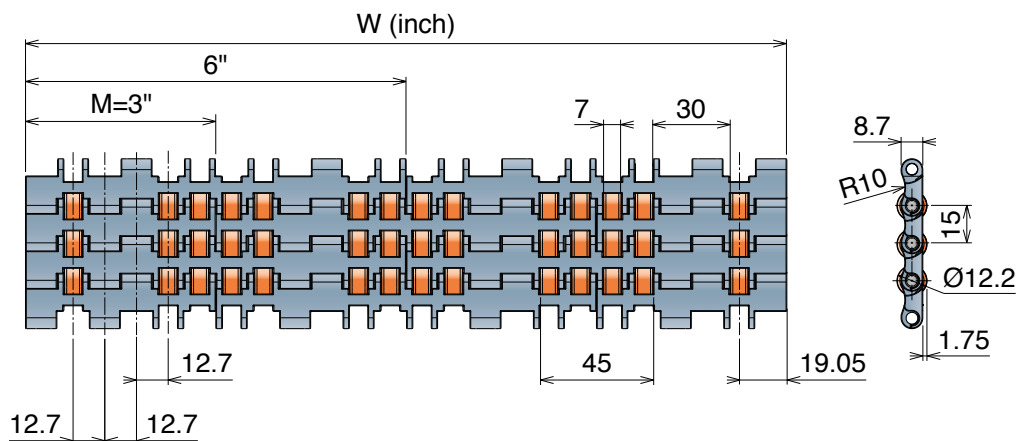


Guide position for accumulation system - Example

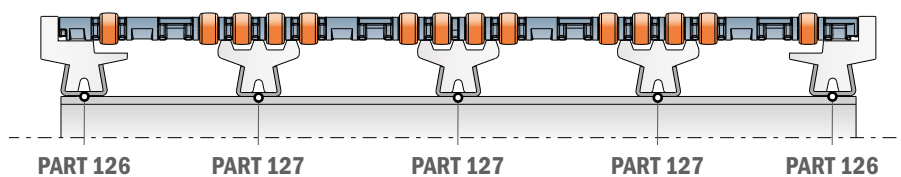

For accumulation system, please place the wear strips between the rollers (max 25 mm).

Guide position for driven rollers, for alignment/distribution system - Example

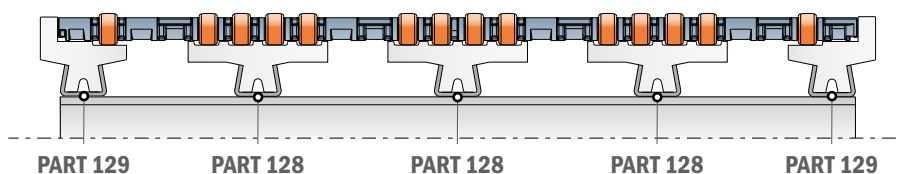

For driven rollers, please place the wear strips directly in contact under the rollers.

530 PRO LBP can also be used with standard profiles: consult extruded profiles section for more details.



Rollers configuration for
530 PRO LBP,
6 inch wide belt.

Version A - Standard

Series	Material	Width	Version
5237	01	0006	A
5237	01	0009	A
5237	01	0012	A
5237	01	0015	A
5237	01	0018	A
5237	01	0021	A
5237	01	0024	A
5237	01	0027	A
5237	01	0030	A
5237	01	0033	A
5237	01	0036	A
5237	01	0039	A
5237	01	0042	A
5237	01	0045	A
5237	01	0048	A
5237	01	0051	A
5237	01	0054	A